

### KStrong® Kapture™ Essential 3-Point Full Body Harness, Dorsal D-Ring, MB Legs (ANSI)

KStrong® Kapture™ Essential 3-Point Adjust Lightweight Full Body Harness with One (1) Dorsal D-Ring and Mating Buckle Leg Closures (ANSI)

#### MODEL

UFH10101P(L-XL)

#### SIZE

Large to  
X-Large

#### WEIGHT

2.60 lbs. ± 0.02 lbs.  
(1179 gm ± 10 gm)

#### DESIGN

- One dorsal attachment D-ring for fall arrest.
- Adjustable leg straps.

#### WEBBING

Material: Polyester  
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)  
Breaking Strength: 5000 lbs.

#### STITCHING THREAD

Material: High-tenacity polyester

#### METAL COMPONENT

Material: Alloy Steel  
Finish: Silver or Golden Yellow Galvanized

#### CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

#### RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.11-2014



FRONT VIEW

SIDE VIEW

BACK VIEW

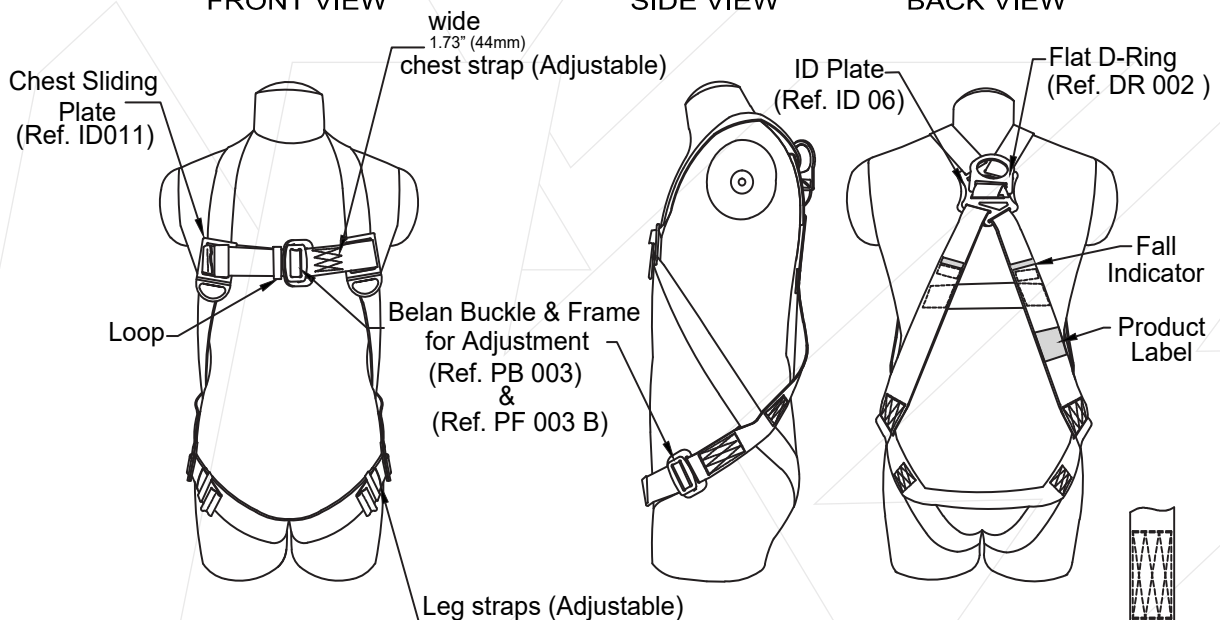

Meets or Exceeds ANSI Z359.11-2014



STITCHING DESIGN

## KStrong® 6 ft. Twin Leg 100% Tie Off internal design SAL with one loop and two rebar hooks (ANSI)

Model: UFL204112

KStrong® 6 ft. Twin Leg 100% Tie Off internal design shock absorbing lanyard with one loop and two steel rebar hooks (ANSI)

### DESIGN

- 1.57 in. wide polyester tubular webbing incorporated with energy absorbing (6 ft.) polyester webbing. Two ends have a textile loop with steel rebar hooks (PN 167). The other end has a webbing loop.

### WEBBING

Material: Polyester  
Width: 1.57 in.  $\pm$  0.04 in. (40mm  $\pm$  1mm)  
Breaking Strength: 6000 lbs. (2722kg)

### STITCHING THREAD

Material: High-tenacity polyester

### METAL COMPONENT


Material: Alloy steel  
Finish: Silver or Golden Yellow Galvanized  
Breaking Strength: 5000 lbs. (2268kg)

### WEIGHT


4.39 lbs.  $\pm$  0.02 lbs. (1990 gm  $\pm$  10 gm)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

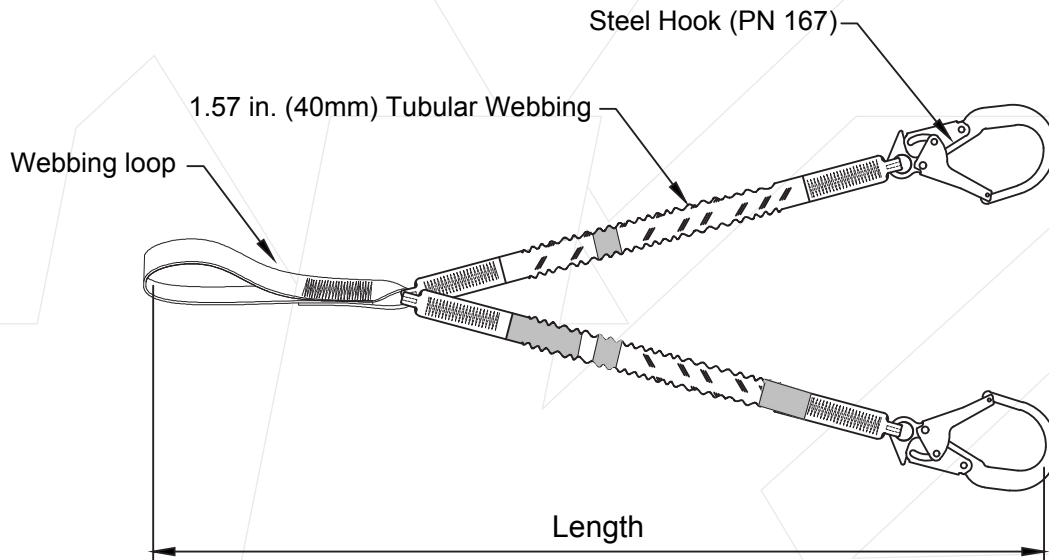

Meets or Exceeds ANSI Z359.13-2013



Stitching Pattern