

KStrong® Kapture™ Elite 5-Point Full Body Harness, Dorsal D-Ring, MB Legs (ANSI)

KStrong® Kapture™ Elite 5-Point Adjust Full Body Harness with One (1) Dorsal D-Ring and Mating Buckle Leg Closures (ANSI)

MODEL	SIZE	WEIGHT
UFH10201P(S-M)	Small to Medium	3.14 lbs. ± 0.02 lbs. (1424 gm ± 10 gm)

DESIGN

- One dorsal attachment D-ring for fall arrest.
- Adjustable Shoulder straps.
- Adjustable leg straps.

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT


Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

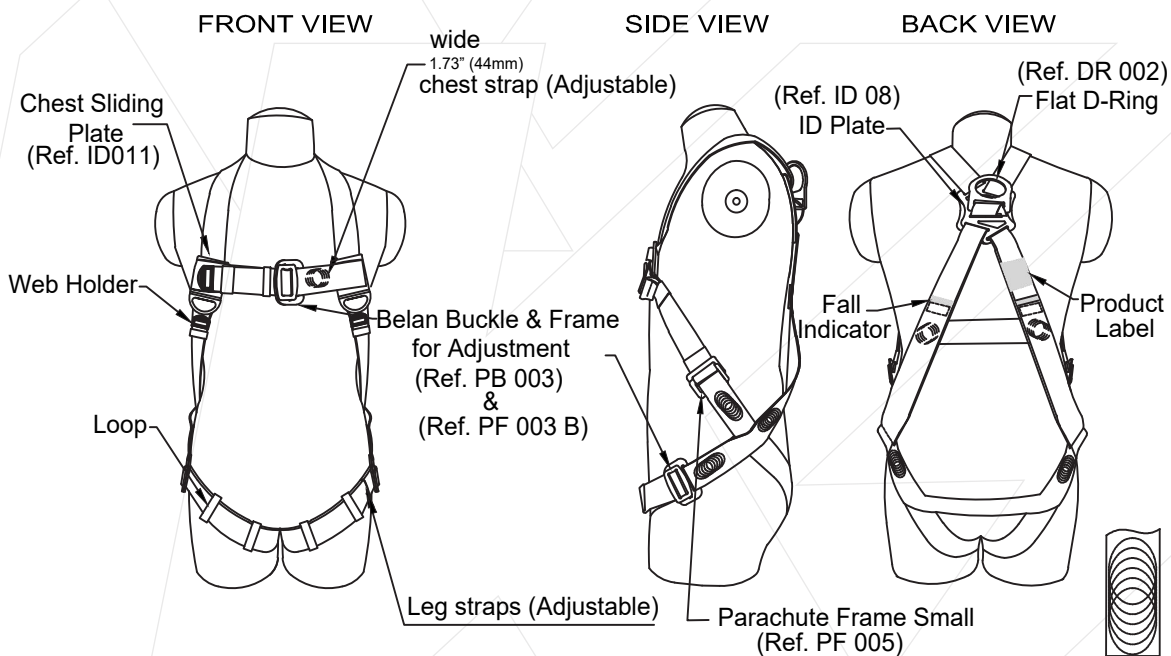

Meets or Exceeds ANSI Z359.11-2014

KStrong® 6 ft. Twin Leg 100% Tie Off internal design SAL with one loop and two rebar hooks (ANSI)

Model: UFL204112

KStrong® 6 ft. Twin Leg 100% Tie Off internal design shock absorbing lanyard with one loop and two steel rebar hooks (ANSI)

DESIGN

- 1.57 in. wide polyester tubular webbing incorporated with energy absorbing (6 ft.) polyester webbing. Two ends have a textile loop with steel rebar hooks (PN 167). The other end has a webbing loop.

WEBBING

Material: Polyester
Width: 1.57 in. \pm 0.04 in. (40mm \pm 1mm)
Breaking Strength: 6000 lbs. (2722kg)

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT


Material: Alloy steel
Finish: Silver or Golden Yellow Galvanized
Breaking Strength: 5000 lbs. (2268kg)

WEIGHT

4.39 lbs. \pm 0.02 lbs. (1990 gm \pm 10 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

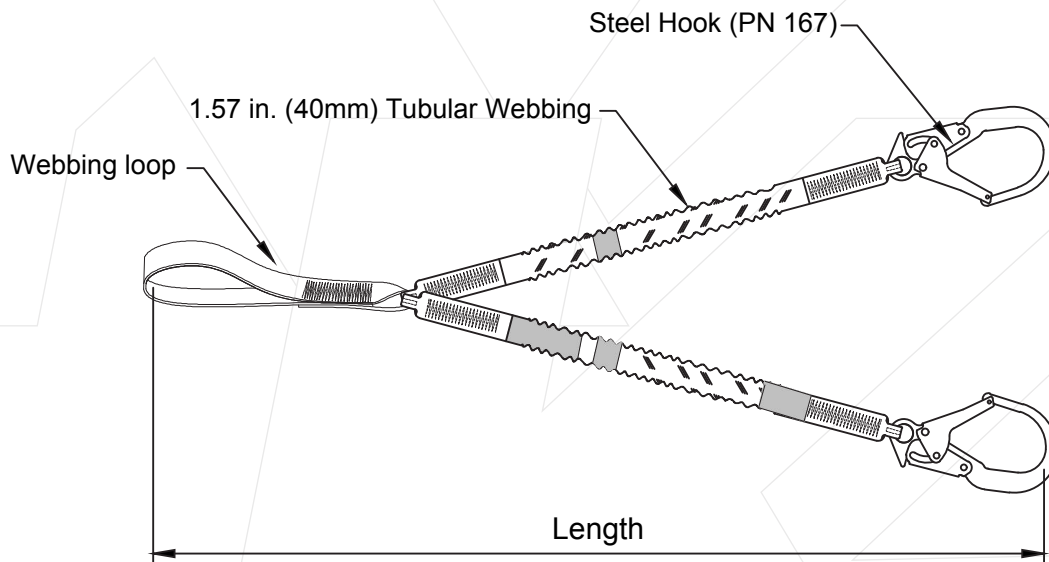

Stitching Pattern

Meets or Exceeds ANSI Z359.13-2013