

KStrong® Kapture™ Elite 5-Point Full Body Harness, Dorsal D-Ring, MB Legs (ANSI)

KStrong® Kapture™ Elite 5-Point Adjust Full Body Harness with One (1) Dorsal D-Ring and Mating Buckle Leg Closures (ANSI)

DESIGN

- One dorsal attachment D-ring for fall arrest
- Adjustable shoulder straps
- Adjustable mating buckle leg straps

WEBBING

Material: Polyester
Width: 1.73 in. \pm 0.04 in. (44mm \pm 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT


Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021

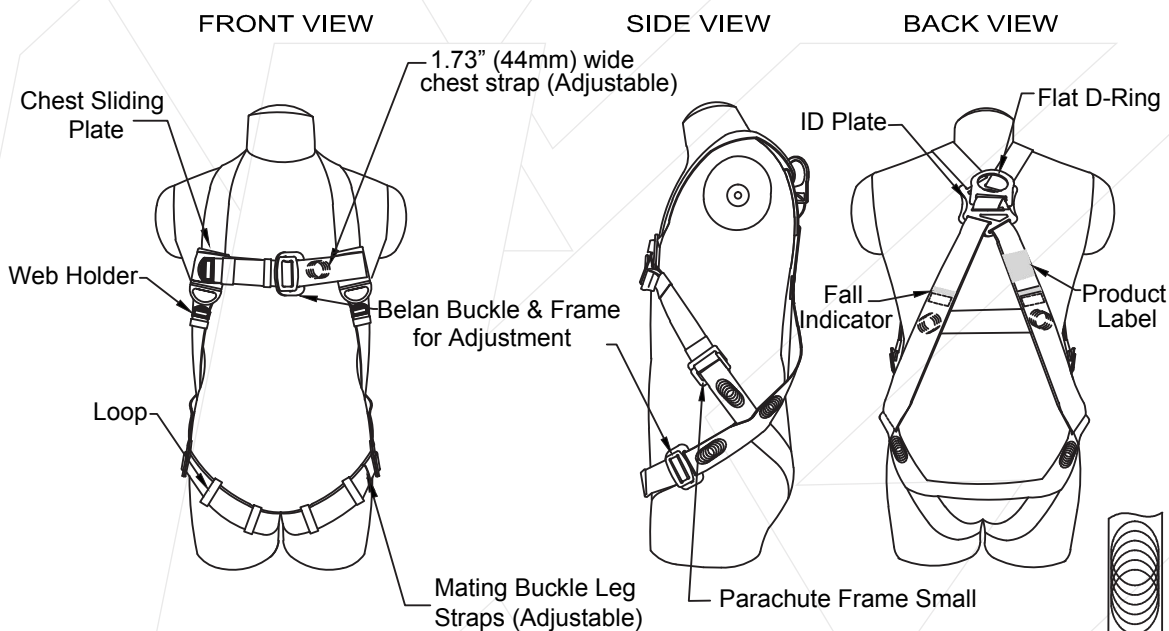

Meets or Exceeds ANSI Z359.11-2021

STITCHING DESIGN



KStrong® 6 ft. Micron™ SRL with Snap Hook (ANSI) - Harness Connector Included

Model: UFS350002

MICRON™
SRL SERIES

KStrong® 6 ft. Micron™ Lightweight SRL with one (1) snap hook at anchor end (ANSI). Includes one (1) quarter turn locking carabiner (UFC401101).

PHYSICAL PARAMETERS

- Lightest available SRL in its range/class
- Robust & durable plastic casing
- Dyneema Webbing with Energy absorber
- Steel snap hook at attachment end

LENGTH

6 ft.

WEBBING

Material: Dyneema Webbing 13/16" (21mm)
Min. Breaking strength: 4500 lbs.

WEIGHT

3.51 lbs. ± 0.22 lbs. (1592 gm ± 100 gm)

USER CAPACITY

OSHA Working Load Capacity: 420 lbs.
ANSI Working Load Capacity: 310 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1

Class

1

Anchor at or above dorsal D-ring

**OSHA
RATED**


**420
LBS.**

MICRON




The Micron™ series of SRL's have not only been tested to ANSI Z359.14-2021 but also to a Fall Factor of 2. This means that when a preferred overhead anchor point is not present, a worker may connect to a suitable anchor up to 5 ft. below the dorsal D-ring height of their full body harness.

FRONT VIEW

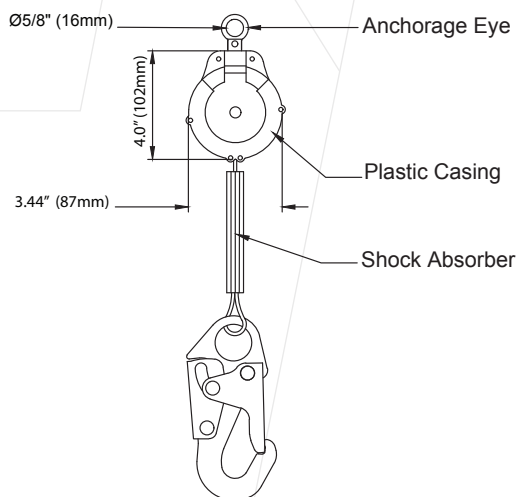

SIDE VIEW

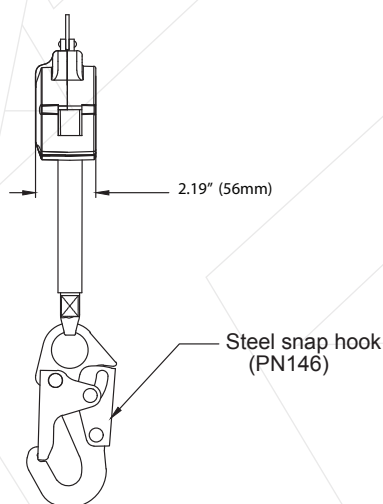

Batch #: _____ Serial #: _____

Date of First Use: _____