

KStrong® Kapture™ Elite 5-Point Full Body Harness, Dorsal D-Ring, TB Legs (ANSI)

KStrong® Kapture™ Elite 5-Point Adjustable Full Body Harness with One (1) Dorsal D-Ring and Tongue Buckle Leg Closures (ANSI)

KIT MODEL	HARNESS	SIZE	WEIGHT
UFK23110(S-M)	UFH10201G(S-M)	Small to Medium	3.52 lbs. ± 0.02 lbs. (1597 gm ±10 gm)
UFK23110(M-L)	UFH10201G(M-L)	Medium to Large	3.56 lbs. ± 0.02 lbs. (1615 gm ±10 gm)
UFK23110(L-XL)	UFH10201G(L-XL)	Large to X-Large	3.60 lbs. ± 0.02 lbs. (1633 gm ±10 gm)

DESIGN

- One dorsal attachment D-ring for fall arrest
- Adjustable Shoulder straps
- Adjustable tongue buckle leg straps

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT



Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

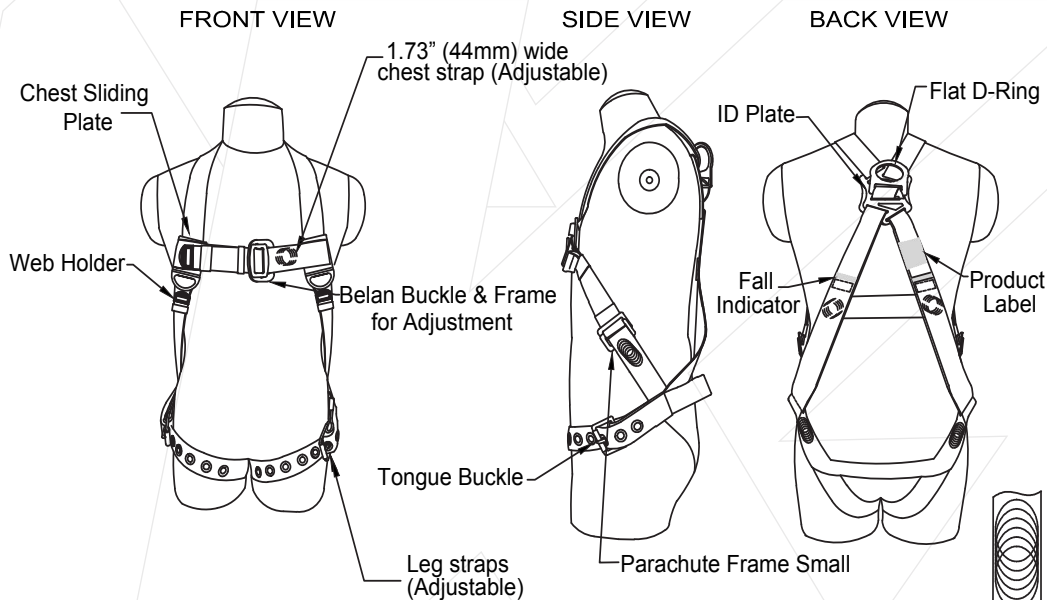

STITCHING DESIGN

Meets or Exceeds ANSI Z359.11-2014

KStrong® 6 ft. Clear pack design shock absorbing lanyard with snap hooks (ANSI)

Model: UFL201101

KStrong® 6 ft. Clear pack design shock absorbing lanyard with two (2) snap hooks (ANSI).

DESIGN

- Single leg lanyard incorporated with energy absorber (PN 500).
- Both ends of the lanyard equipped with steel snap hook (PN-146).

WEBBING

Material: Polyester
Width: 1.18 in. \pm 0.04 in. (30mm \pm 1mm)
Breaking Strength: 6000 lbs. (2722kg)

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT


Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized
Breaking Strength: 5000 lbs. (2268kg)

WEIGHT

2.72 lbs. \pm 0.02 lbs. (1234g \pm 10g)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

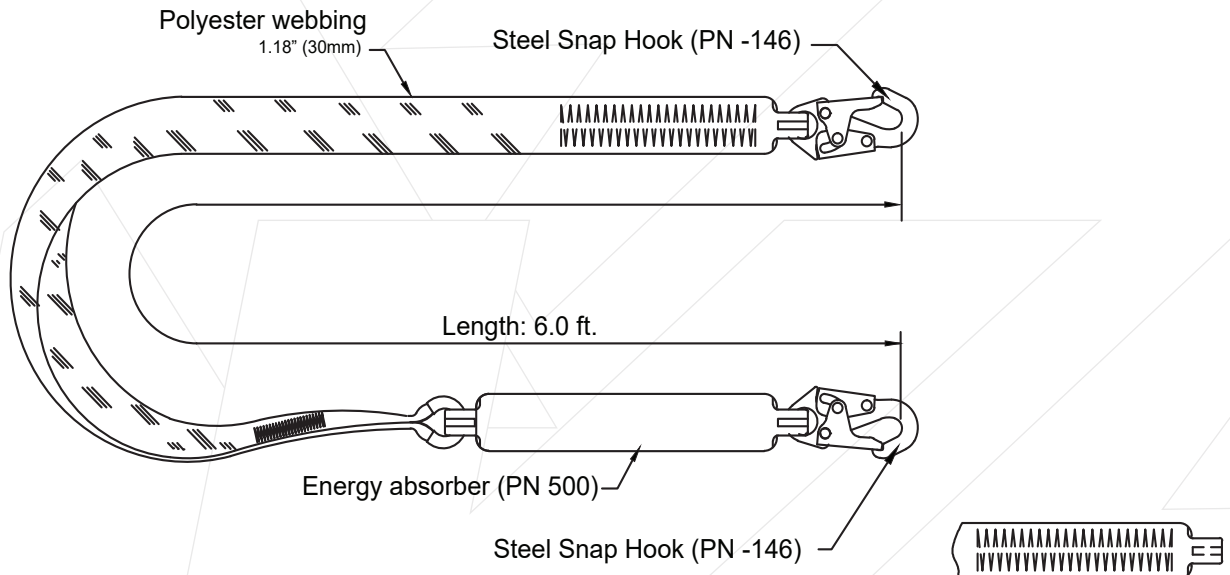

Meets or Exceeds ANSI Z359.13-2013

Stitching Pattern