

## KStrong® 6 ft. Leading Edge (LE) Rated Clear Pack Design shock absorbing coated wire lanyard with snap hook and rebar hook (ANSI)

Model: UFL201611

6' Clear Pack SAL Wire Cable Leading Edge (LE) rated with snap hook on one end, other end rebar hook.

### DESIGN

- Single leg wire rope lanyard incorporated with Energy absorber (PN 500).
- Steel Stamped Snap Hook PN 145 at attachment end and Steel Form Hook PN 167F at anchorage end.
- Abrasion resistant thimbles provided within loops.

### WIRE ROPE

Ø0.24" (6mm) Steel Wire Rope  
Wire Covered with 0.08" (2mm) PVC Coating.  
Breaking strength minimum 25 KN.

### METAL COMPONENTS


Material: Alloy Steel  
Plating: Zinc Plated  
Finish: Shot blasted

### WEIGHT OF LANYARD

5.07 lbs. ± 0.02 lbs. (2300gm ± 10gm)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

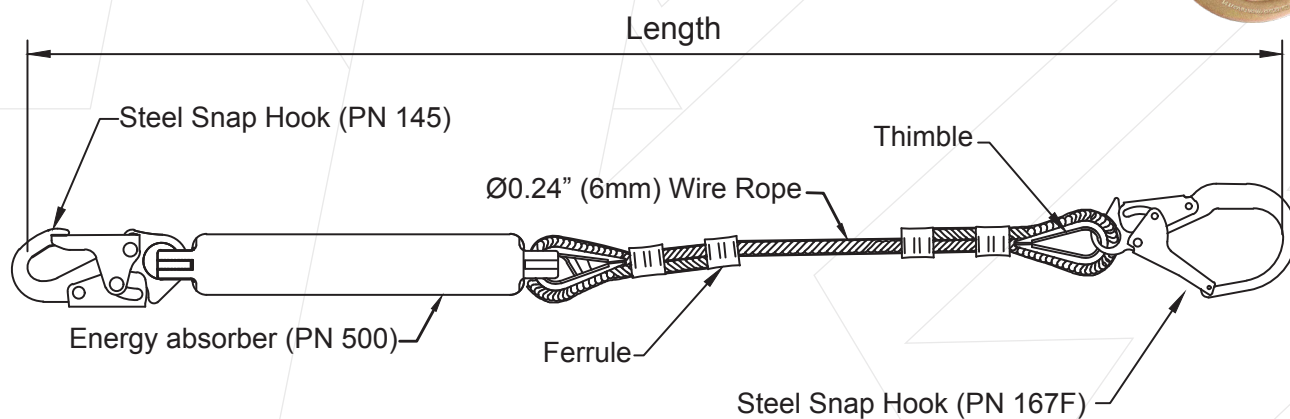

Length: 6 ft.