

KStrong® 6 ft. Elasticated design shock absorbing lanyard with snap hook and rebar hook (ANSI)

Model: UFL206111

KStrong® 6 ft. Elasticated (stretches from 4.5 ft. to 6 ft.) design shock absorbing lanyard with one (1) snap hook and one (1) rebar hook (ANSI)

DESIGN

- 1.57 in. (40mm) wide polyester tubular elasticated webbing incorporated with energy absorbing 6 ft. length. Poy Webbing on both sides with textile loops equipped with Steel Stamped Snap Hook (PN 146) on one side and Steel Snap Hook (PN 167) on other side.

WEBBING

Material: Polyester
Width: 1.57 in. \pm 0.04 in. (40mm \pm 1mm)
Breaking Strength: 5000 lbs. (2268kg)

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT


Material: Alloy steel
Plating: Zinc plated
Finish: Shot blasted
Breaking Strength: 5000 lbs. (2268kg)

WEIGHT


3.46 lbs. \pm 0.02 lbs. (1570 gm. \pm 10 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

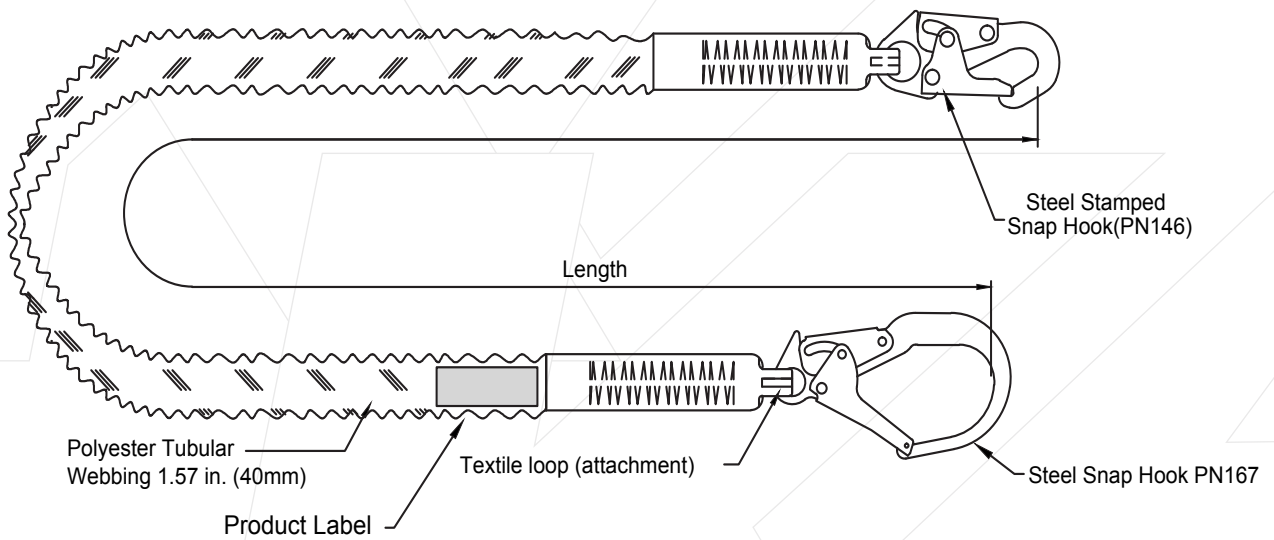

Meets or Exceeds ANSI Z359.13-2013



Stitching Pattern

Length: 6 ft.