

## KStrong® 6 ft. Elasticated Design Shock Absorbing Lanyard with Aluminum Snap Hook and Aluminum Rebar Hook (ANSI)

Model: UFL206214

KStrong® 6 ft. Elasticated (stretches from 4.5 ft. to 6 ft.) design shock absorbing lanyard with one (1) aluminum snap hook and one (1) aluminum rebar hook (ANSI)

### DESIGN

- 1.57 in. (40mm) wide polyester tubular elasticated webbing incorporated with energy absorbing 6 ft. length. Poy Webbing on both sides with textile loops equipped with Aluminum Snap Hook on one side and Aluminum Rebar Hook (UFC408450) on other side.

### WEBBING

Material: Polyester.  
Width : 1.57" ± 0.04" (40mm ± 1mm)  
Breaking strength: 6000 lbs. (2722kg)

### STITCHING THREAD

Material: High-tenacity polyester

### METAL COMPONENT


Material: Aluminum Alloy Body, Alloy Steel Gate & Lock  
Finish: Black Anodized Body, Golden Yellow Galvanized Gate & Lock  
Breaking Strength: 5000 lbs. (2268kg)

### WEIGHT

2.90 lbs. ± 0.02 lbs. (1315 gm ± 10 gm)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

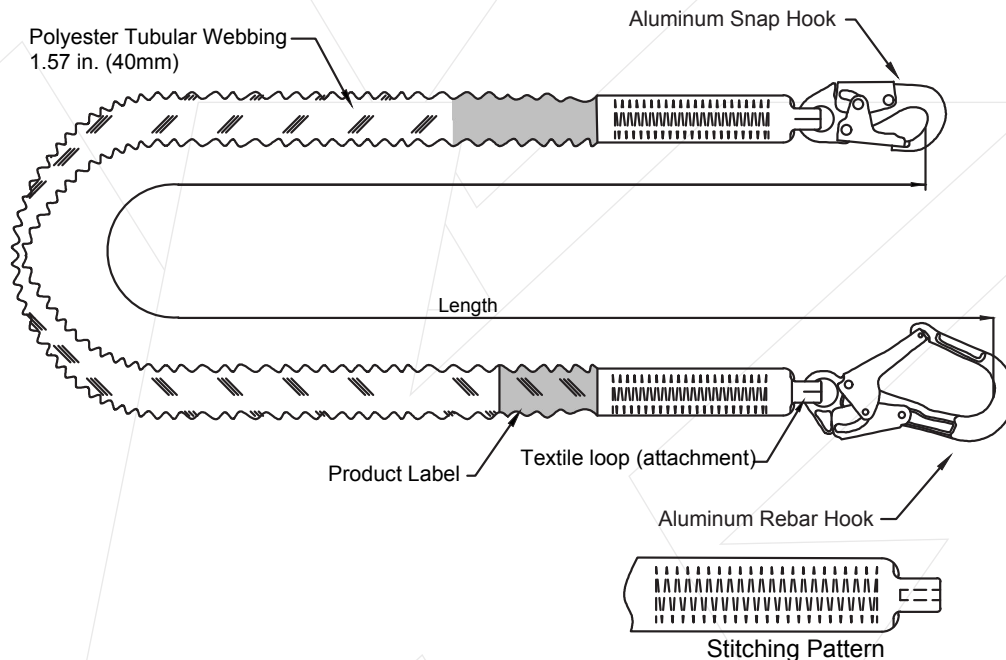

Meets or Exceeds ANSI Z359.13-2013

Length: 6 ft.