

## KStrong® BRUTE™ Backer™ LE V2 Class 2 - Dual Interchangeable 8.5 ft. Cable SRL-P with Swivel Snap Hooks at Anchorage End, Other End Dorsal Connector Shock Pack Assembly (ANSI)

Model: UFS310206LDV2



### DESIGN

- Designed to be used as retractable twin-leg shock absorbing lanyard
- Robust & durable plastic casing
- Has swivel anchorage eye at anchorage end
- Ultralight design almost unnoticeable on the users back
- Twin-leg retractable lanyard with steel snap hook at termination end and shock pack at harness attachment end
- Twin SRL connector for connection to the dorsal attachment of harness
- Compatible to be used where anchor point is not available above the user's head; can be used near a potential leading edge
- Equipped with special plastic clamp shell to provide stability to shock absorbing assembly which allows the shock pack to deploy at an average force of 650 lbs

### LENGTH

8.5 Feet.

### CABLE

Material: Galvanizd steel wire rope Ø3/16"  
Minimum Breaking Strength: 4000 lbs. (1814kg)


### WEIGHT

8.13 lbs. ± 0.22 lbs. (3688gm ± 100gm)

Class

**2**

Anchor above or  
below dorsal D-ring

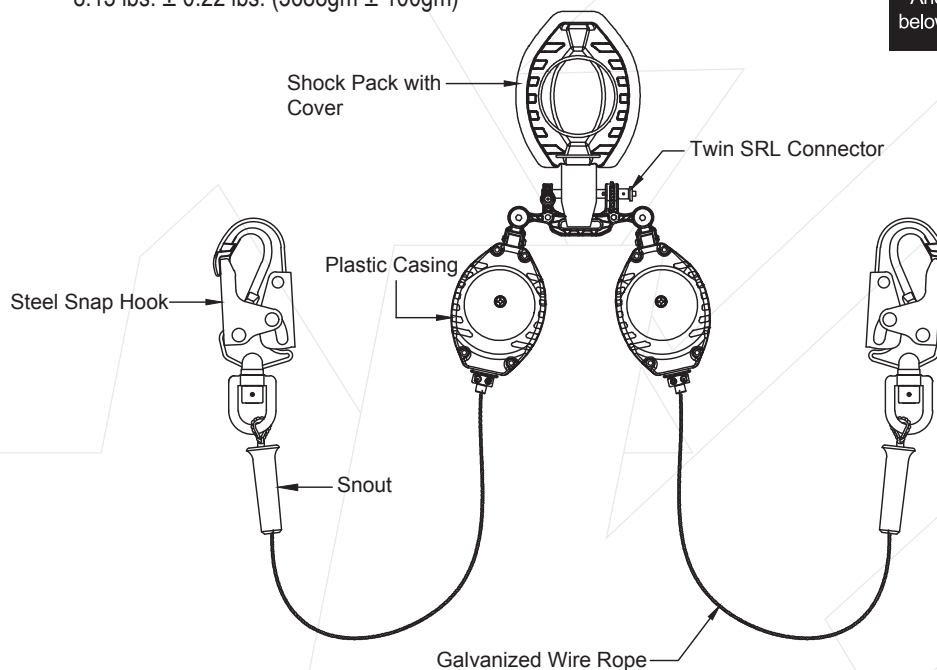

Batch #: \_\_\_\_\_ Serial #: \_\_\_\_\_

Date of First Use: \_\_\_\_\_