

KStrong® BRUTE™ Backer™ LE V2 Class 2 - Dual Interchangeable 8.5 ft. Cable SRL-P with Rebar Hooks at Anchorage End, Other End Dorsal Connector Shock Pack Assembly (ANSI)

Model: UFS314006LDV2



DESIGN

- Designed to be used as retractable twin-leg shock absorbing lanyard
- Robust & durable plastic casing
- Has swivel anchorage eye at anchorage end
- Ultralight design almost unnoticeable on the users back
- Twin-leg retractable lanyard with steel rebar hook at termination end and shock pack at harness attachment end
- Twin SRL connector for connection to the dorsal attachment of harness
- Compatible to be used where anchor point is not available above the user's head; can be used near a potential leading edge
- Equipped with special plastic clamp shell to provide stability to shock absorbing assembly which allows the shock pack to deploy at an average force of 650 lbs

LENGTH

8.5 Feet.

CABLE

Material: Galvanized steel wire rope Ø3/16"
Minimum Breaking Strength: 4000 lbs. (1814kg)


WEIGHT

8.77 lbs. ± 0.22 lbs. (3978gm ± 100gm)

Class

2

Anchor above or
below dorsal D-ring

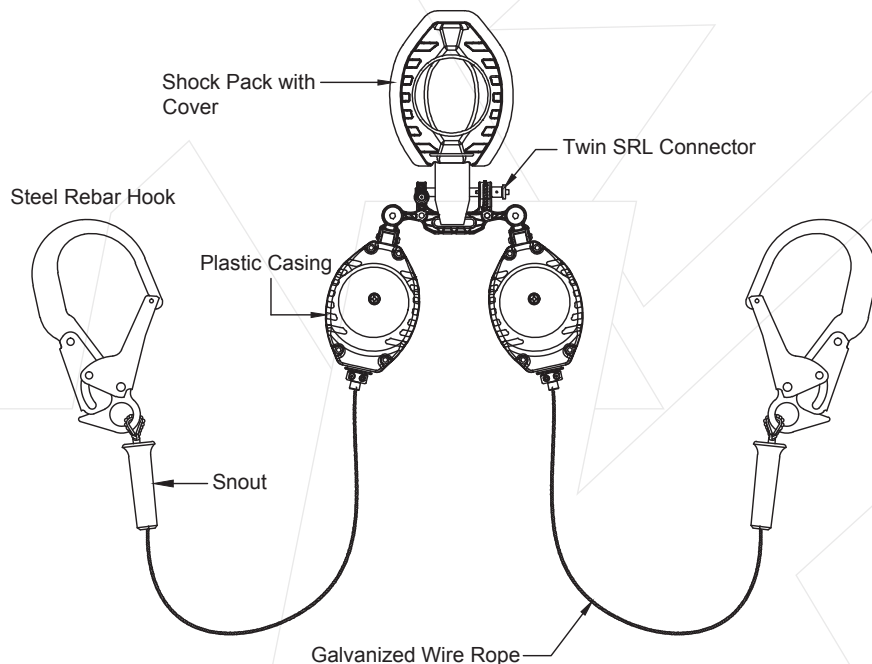

Batch #: _____ Serial #: _____

Date of First Use: _____