

KStrong® BRUTE™ Backer™ LE 8.5 ft. Cable SRL-LE with Aluminum swivel rebar hook at connector end and shock pack with Twin SRL connector at top (ANSI)

Model: UFS316106L



DESIGN

- Designed to be used as retractable twin leg shock absorbing lanyard.
- Robust & durable plastic casing.
- Has swivel anchorage eye at anchorage end.
- Ultralight design almost unnoticeable on the users back.
- Galvanized steel wire rope (option of having S.S. wire rope available)
- Single leg retractable lanyard with Aluminum rebar hook (Our ref. PN 159) at termination end and shock pack at harness attachment end.
- Twin SRL connector (UFC409151) for connection to the Dorsal attachment of harness.
- Compatible to be used where anchor point not available above users head / can be used near a potential leading edge.

LENGTH

8.5 ft.

WEBBING


Material: Galvanized steel wire rope Ø3/16".
Minimum Breaking strength: 3400 lbs. (1542 kg)

WEIGHT


4.18 lbs. ± 0.22 lbs. (1898 gm ± 100 gm)

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2014 Class B

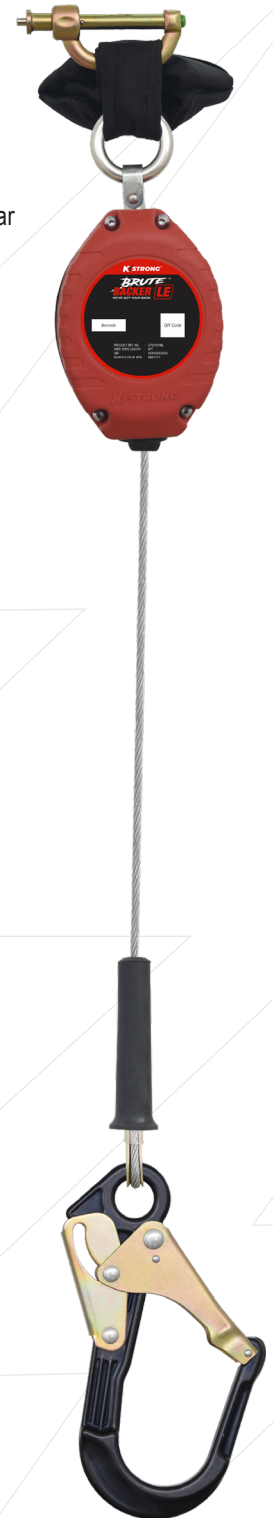

SIDE VIEW

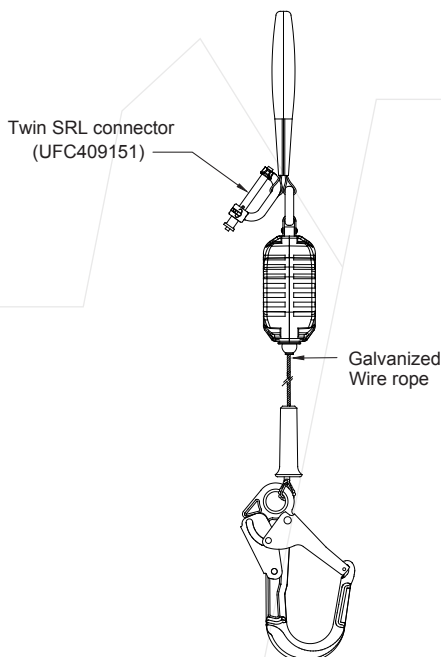

FRONT VIEW

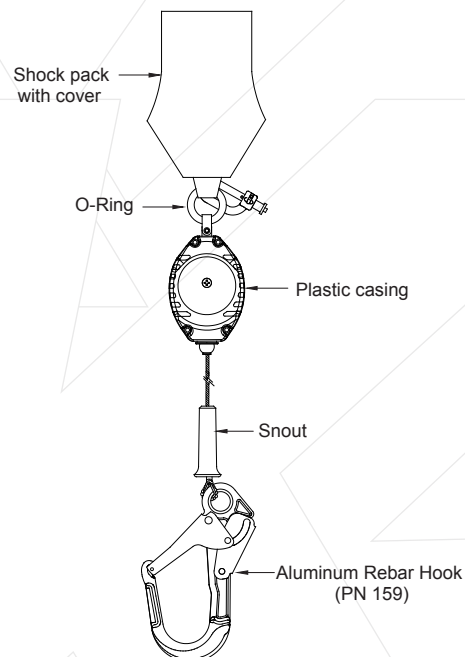

Meets or Exceeds ANSI Z359.14-2014 Class B