

KStrong® BRUTE™ Backer™ LE Dual 8.5 ft. Cable SRL-LE Assembly with Aluminum Rebar Hooks at Connector End and Shock Pack with Twin SRL Connector at Top (ANSI)

Model: UFS316106LD



DESIGN

- Robust & durable plastic casing
- Has swivel anchorage eye at anchorage end
- Ultralight design almost unnoticeable on the users back
- Galvanized steel wire rope
- Twin legged retractable lanyard with Aluminum rebar hooks at termination end and shock pack at harness attachment end
- Twin SRL connector (UFC409151) for connection to the Dorsal attachment of harness
- Compatible to be used where anchor point not available above users head / can be used near a potential leading edge
- Comes with special plastic clamp shell to provide stability to shock absorbing assembly which allows the shock pack to deploy at an average force of 650 lbs.

LENGTH

8.5 ft.

CABLE

Material: Galvanized steel wire rope Ø3/16"
Minimum Breaking Strength: 3400 lbs. (1542 kg)

WEIGHT

8.39 lbs. ± 0.22 lbs. (3806 gm ± 100 gm)



RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 2

Class

2

Anchor above or below dorsal D-ring

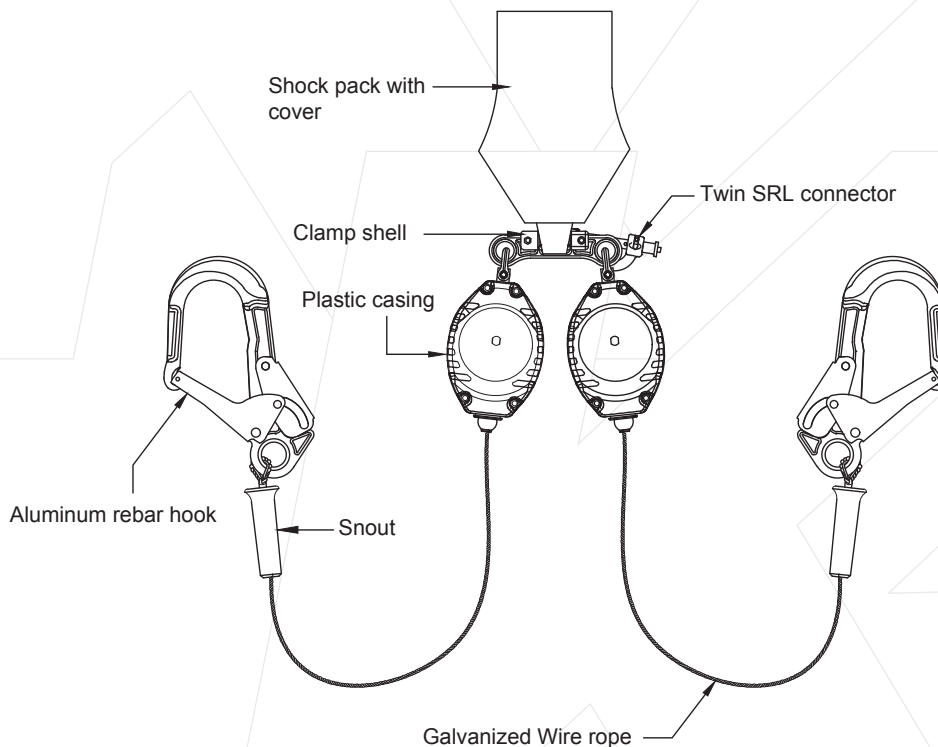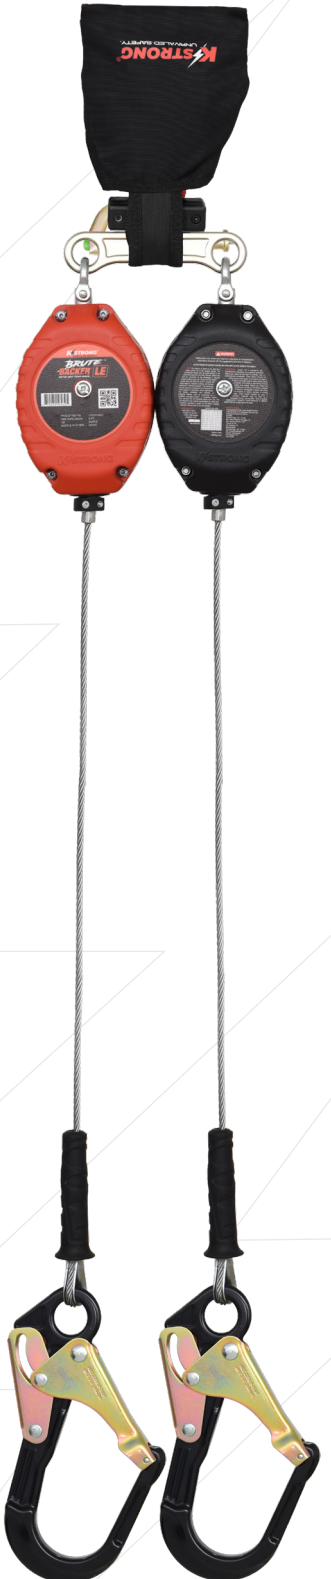

Batch #: _____ Serial #: _____
Date of First Use: _____