

KStrong® BRUTE™ Backer™LE 8.5 ft. Web SRL with Aluminum Rebar Hook at Anchorage End, Other End Dorsal Connector Shock Pack Assembly (ANSI)

Model: UFS356106L



8.5' Leading Edge (LE) Rated Web SRL with Aluminum Rebar Hook at Anchorage End, Other End Dorsal Connector Shock Pack Assembly

DESIGN

- Robust & durable plastic casing
- Has swivel anchorage eye at anchorage end
- Aluminum rebar hook at retractable end
- Twin SRL connector for connection to the Dorsal attachment of harness
- Dyneema® 1" Cut Resistant Webbing

LENGTH

8.5 ft.

WEBBING

Material: Dyneema® 1" Cut Resistant Webbing

WEIGHT

8.92 lbs. ± 0.22 lbs. (4.04kg ± 0.10kg)


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 2

Class

2

Anchor above or
below dorsal D-ring

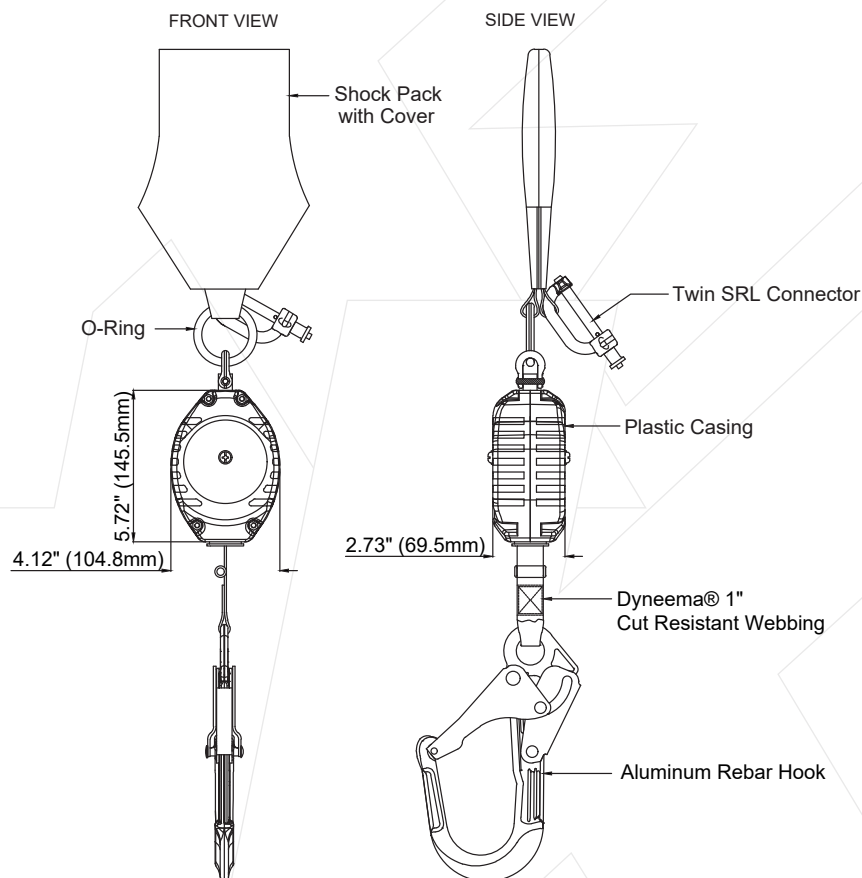

Batch #: _____ Serial #: _____

Date of First Use: _____