

KStrong® BRUTE™ Dual 9 ft. SRL with Hi-Abrasion Resistant Webbing, Forged Rebar Hooks and dorsal connector (ANSI)

Model: UFS359206D

BRUTE™

SRL SERIES

DESIGN

- Robust and durable plastic casing
- Dyneema webbing with energy absorber
- Forged Steel Rebar Hook at each Attachment end (Gate strength 3600 lbs.)
- Twin SRL connector (UFC409151) included

LENGTH

9 ft. (6 ft. internal, 3 ft. external)

WEBBING

Material: Dyneema Webbing 1 in. (25.4mm)
Minimum Breaking Strength: 4500 lbs. (2041 kg)



WEIGHT

7.62 lbs. ± 0.11lbs. (3.46kg ± 0.05kg)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1

Class
1
Anchor at or
above dorsal D-ring

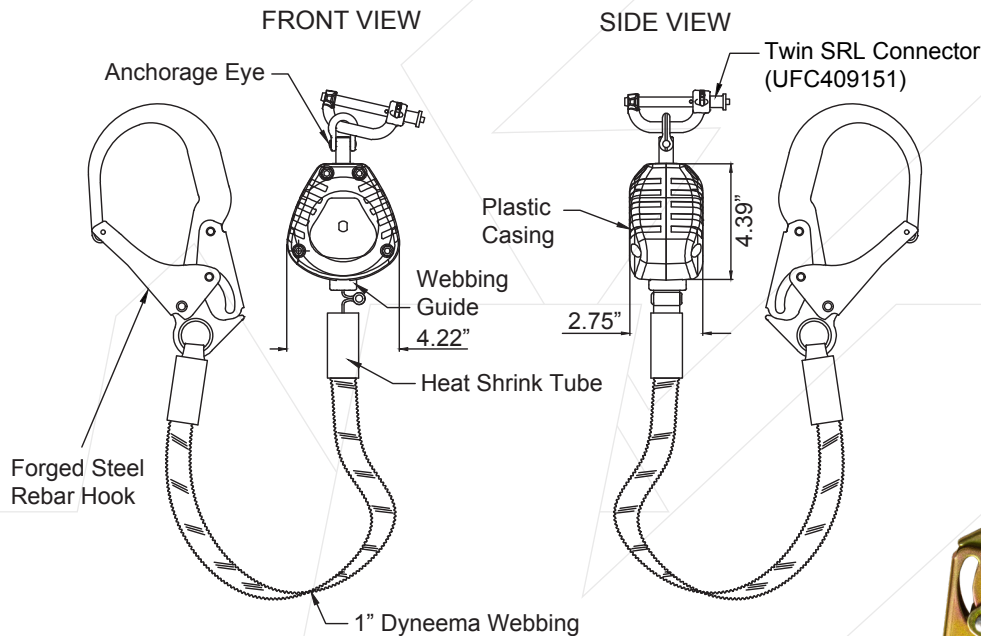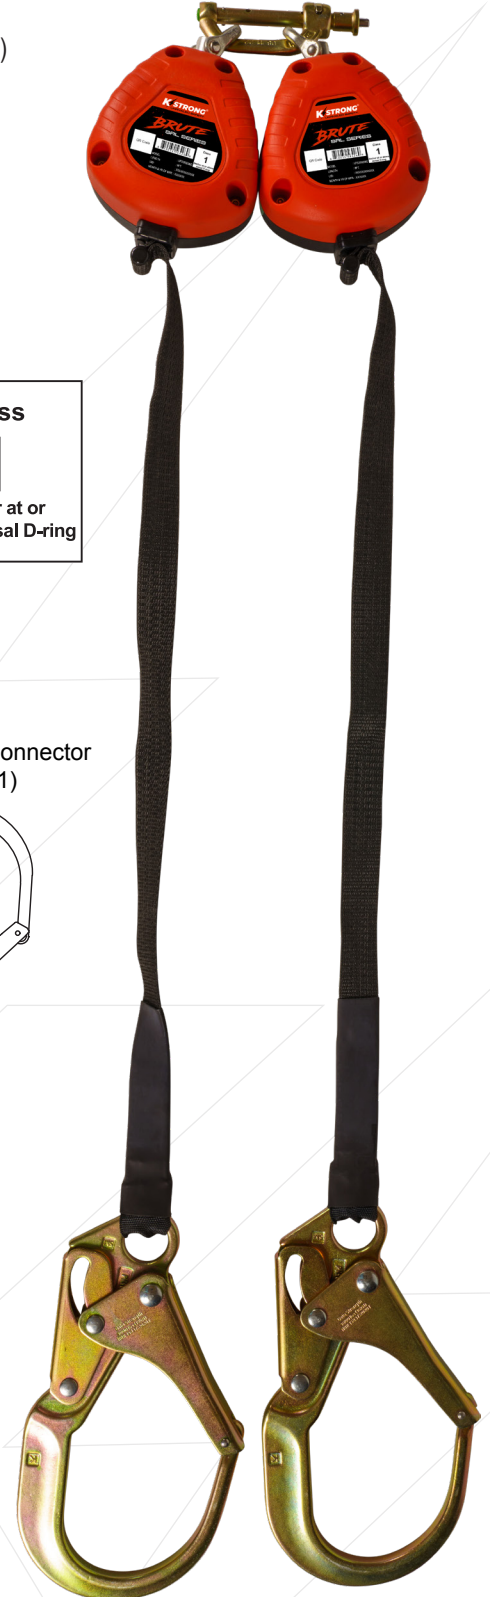

Batch #: _____ Serial #: _____
Date of First Use: _____