

KStrong® BRUTE™ Dual 9 ft. SRL with Hi-Abrasion Resistant Webbing, Forged Rebar Hooks and dorsal connector (ANSI)

Model: UFS359206D

BRUTE™
SRL SERIES**DESIGN**

- Robust and durable plastic casing
- UHMWPE Webbing with Energy absorber
- Twin SRL connector (UFC409151) at top and Forged Steel Formed Hook at Attachment end (UFC408450 as per ANSI Z359.12:2009 gate strength 3600 lbs.)
- Swivel anchorage eye at anchorage end

LENGTH

9 ft.

WEBBING

Material: UHMWPE Webbing 1 in. (25.4mm)
Minimum Breaking Strength: 4500 lbs. (2041kg)

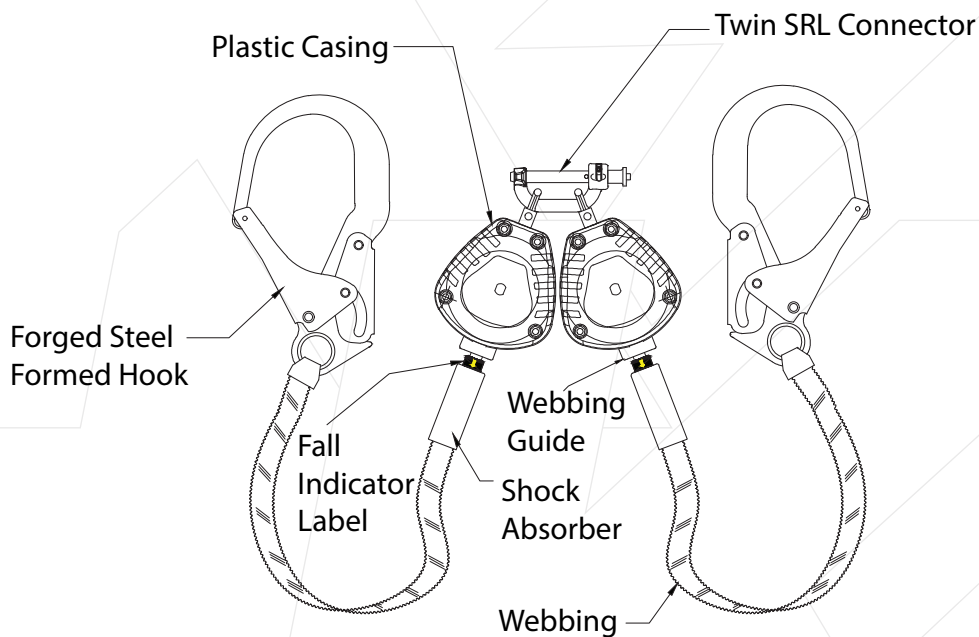
WEIGHT

9.54 lbs. ± 0.01 lbs. (4.32kg ± 0.05kg)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1

Class

1Anchor at or
above dorsal D-ring

Batch #: _____ Serial #: _____
Date of First Use: _____