

KStrong® BRUTE™ 9 ft. SRL with Hi-Abrasion Resistant Webbing, Aluminum Rebar Hook and Dorsal Connector (ANSI)

Model: UFS359506AR

BRUTE™
SRL SERIES

DESIGN

- Robust and durable plastic casing
- UHMWPE webbing with energy absorber
- Aluminum Rebar Hook at Attachment end (UFC408100 as per ANSI Z359.12:2009 gate strength 3600 lbs.).
- Twin SRL connector (UFC409151) at top

LENGTH

9 ft.

WEBBING

Material: UHMWPE Webbing 1 in. (25.4mm)
Minimum Breaking Strength: 4500 lbs. (2041kg)

WEIGHT


3.97 lbs. ± 0.11 lbs. (1.80kg ± 0.05kg)

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2021 Class 1

Class
1
Anchor at or
above dorsal D-ring

FRONT VIEW

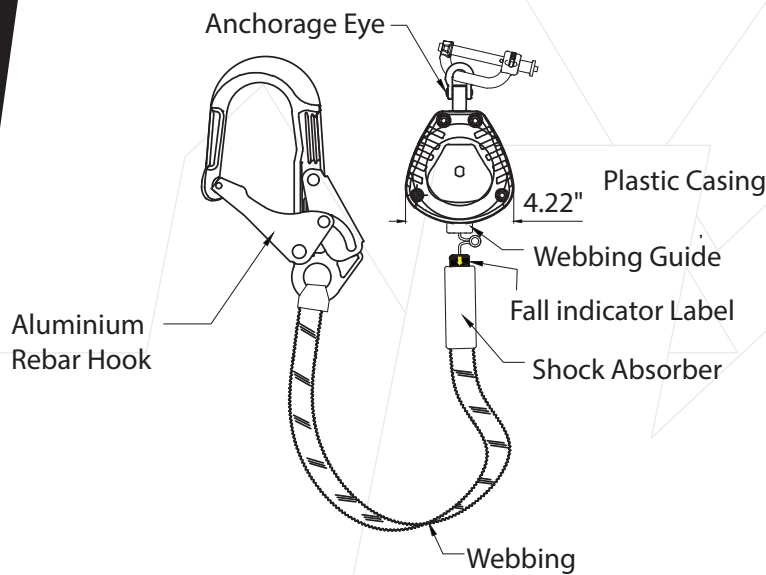

SIDE VIEW

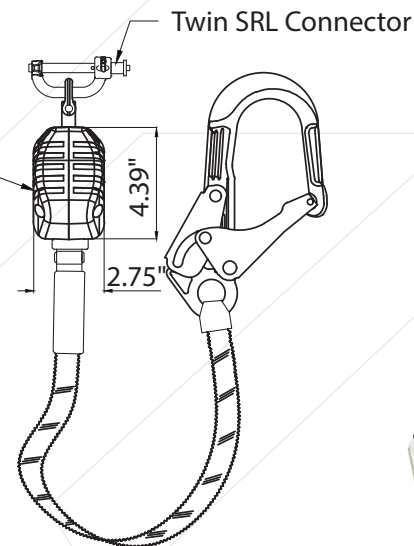

Batch #: _____ Serial #: _____
Date of First Use: _____