

# KStrong® BRUTE™ Dual 9 ft. Web (6 ft. Internal, 3 ft. External) Aluminum SRL with Tie-Back Hooks, Hi-Abrasion Resistant Webbing, and Black ED Casing (ANSI) - Harness Connector Included

Model: UFS359506D

## BRUTE™ SRL SERIES

### DESIGN

- Robust & durable plastic casing
- UHMWPE Webbing with Energy absorber
- Twin SRL connector (UFC409151) at top and Tie back hook at bottom end
- Swivel anchorage eye at anchorage end

### LENGTH

9 ft.

### WEBBING

Material: UHMWPE Webbing 1 in. (25.4mm)  
Minimum Breaking Strength: 4500 lbs. (2041kg)


### WEIGHT

6.84 lbs. ± 0.01 lbs. (3.10kg ± 0.05kg)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1

Class  
**1**  
Anchor at or  
above dorsal D-ring

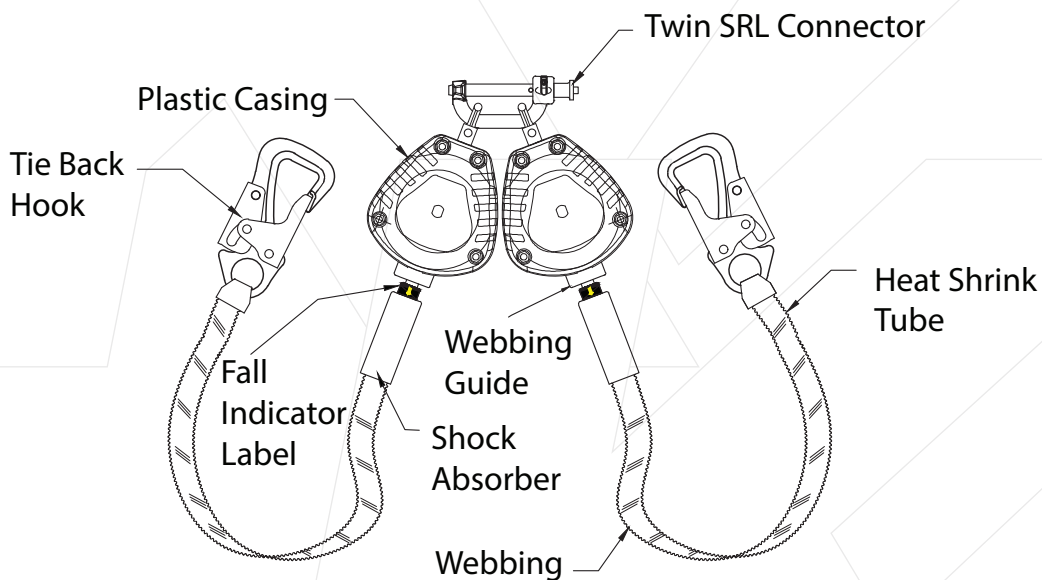

Batch #: \_\_\_\_\_ Serial #: \_\_\_\_\_  
Date of First Use: \_\_\_\_\_