

KStrong® BRUTE™ Dual 9 ft. Tie-Back SRL Assembly with Connectors and Hi-Abrasion Resistant Webbing. Includes installation carabiner (ANSI).

Model: UFS359506D

BRUTE™

SRL SERIES

KStrong® BRUTE™ Dual 9 ft. Tie-Back SRL Assembly with Connectors and Hi-Abrasion Resistant Webbing. Includes one (1) installation carabiner (ANSI).

DESIGN

- Robust & durable plastic casing
- Dyneema webbing
- Twin SRL connector (UFC409151) at top and Tie back hook at bottom end

LENGTH

9 ft. (6 ft. internal, 3 ft. external)

WEBBING

Material: Dyneema Webbing 1 in. (25.4mm)
Minimum Breaking Strength: 4500 lbs. (2041 kg)

WEIGHT

5.63 lbs. ± 0.22 lbs. (2554 gm ± 100 gm)

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2021 Class 1



Class

1

Anchor at or above dorsal D-ring

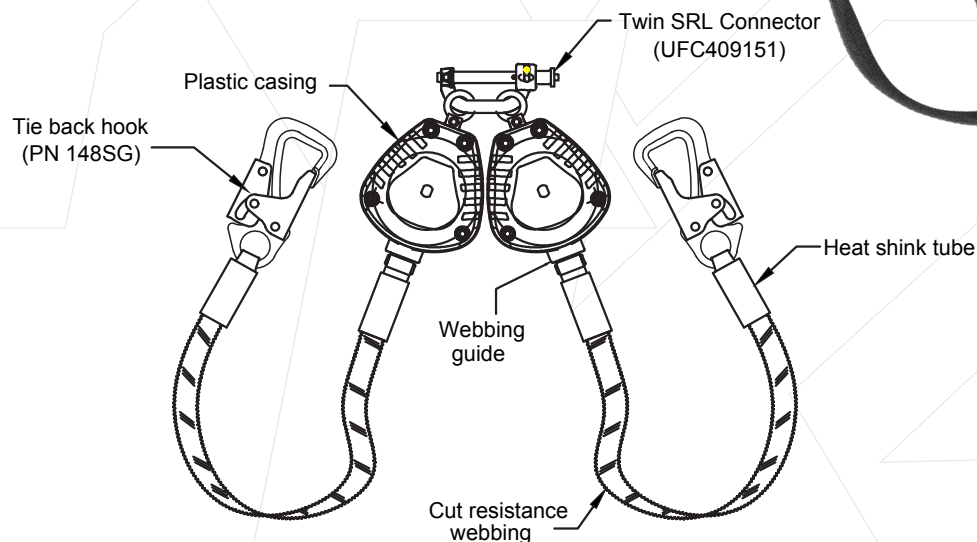

Batch #: _____ Serial #: _____
Date of First Use: _____