

## KStrong® BRUTE™ 9 ft. SRL with Hi-Abrasion Resistant Webbing, Forged Snap Hook and Dorsal Connector (ANSI)

Model: UFS359506S

# BRUTE™

SRL SERIES

### DESIGN

- Robust and durable plastic casing
- Dyneema webbing with energy absorber
- Forged Steel Snap Hook at Attachment end (Gate strength 3600 lbs.)
- Twin SRL connector (UFC409151) included

### LENGTH

9 ft. (6 ft. internal, 3 ft. external)

### WEBBING

Material: Dyneema Webbing 1 in. (25.4mm)  
Minimum Breaking Strength: 4500 lbs. (2041 kg)

### WEIGHT


2.83 lbs ± 0.11lbs. (1.28kg ± 0.05kg)

### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1



**Class**  
**1**  
Anchor at or above dorsal D-ring

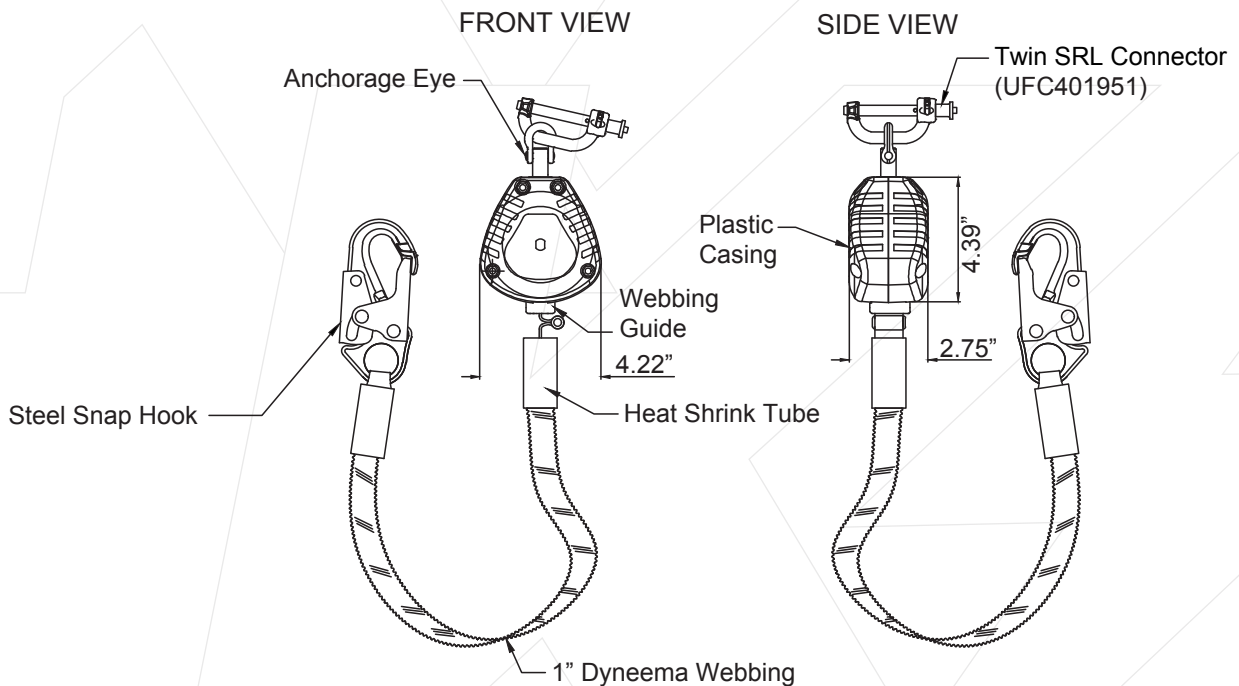

Batch #: \_\_\_\_\_ Serial #: \_\_\_\_\_  
Date of First Use: \_\_\_\_\_