

KStrong® BRUTE™ 9 ft. SRL with Hi-Abrasion Resistant Webbing, Forged Snap Hook and Dorsal Connector (ANSI)

Model: UFS359506S

BRUTE™
SRL SERIES

DESIGN

- Robust and durable plastic casing
- UHMWPE webbing with energy absorber
- Steel Snap Hook at Attachment end (Our ref. PN 145 as per ANSI Z359.12:2009 gate strength 3600 lbs.)
- Twin SRL Connector (UFC409151) at top

LENGTH

9 ft.

WEBBING

Material: UHMWPE Webbing 1 Inches (25.4mm)
Minimum Breaking Strength: 4500 lbs. (2041kg)

WEIGHT

3.52 lbs. ± 0.11 lbs. (1.60kg ± 0.05kg)

RELEVANT STANDARDS


Meets or Exceeds ANSI Z359.14-2021 Class 1

Class


1

Anchor at or
above dorsal D-ring

FRONT VIEW

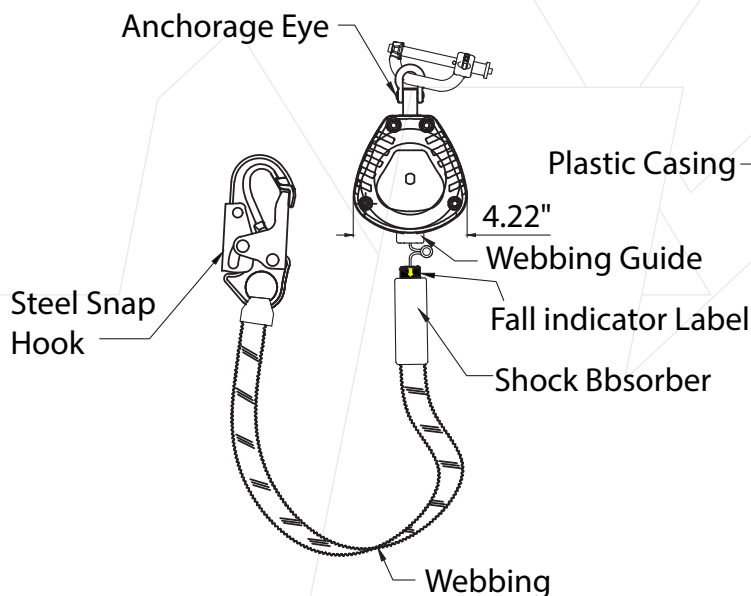

SIDE VIEW

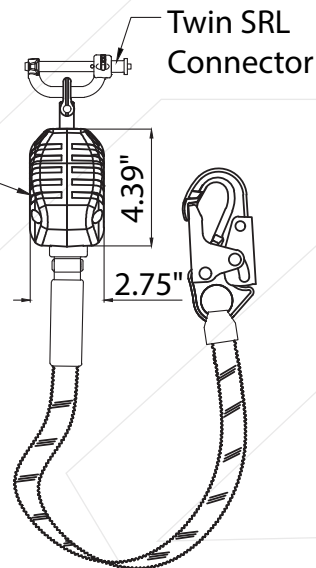

Batch #: _____ Serial #: _____
Date of First Use: _____