

KStrong® BRUTE™ Dual 9 ft. Tie-back SRL with Hi-Abrasion Resistant Webbing, tie-back hooks and dorsal connector (ANSI)

Model: UFS389006D

BRUTE™
SRL SERIES

DESIGN

- Robust & durable aluminum casing duly CED coated
- Has swivel anchorage eye at anchorage end with steel carabiner
- Double leg tie back SRL designed to be used in tie back condition
- Tie back snap hook at the lanyard end to make connection with anchor structure

LENGTH

9 ft.

WEBBING

Material: UHMWPE Webbing 1 in. (25.4mm)
Minimum Breaking Strength: 4500 lbs. (2041kg)

WEIGHT

6.83 lbs. ± 0.01 lbs. (3.10kg ± 0.05kg)


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1

Class

1

Anchor at or
above dorsal D-ring

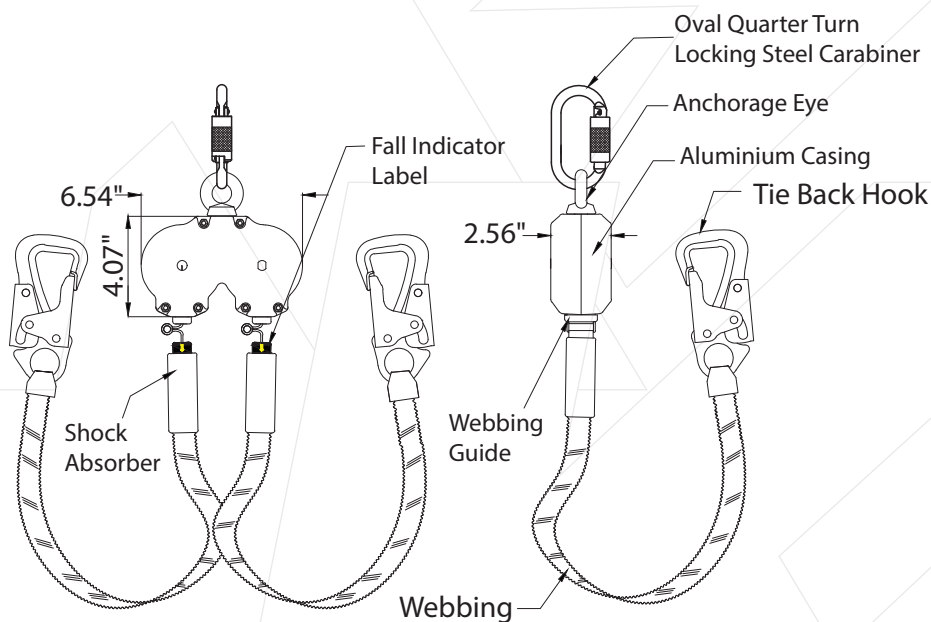

Batch #: _____ Serial #: _____

Date of First Use: _____