

KStrong® BRUTE™ Dual 9 ft. Web (6 ft. Internal, 3 ft. External) Aluminum SRL with Tie-Back Hooks, Hi-Abrasion Resistant Webbing, and Black ED Casing (ANSI) - Aluminum Harness Connector Included

Model: UFS389006DA

BRUTE™
SRL SERIES

DESIGN

- Double leg tie-back SRL designed to be used in tie-back condition
- Tie-back snap hook at the lanyard end to make connection with anchor structure
- Has swivel anchorage eye at anchorage end
- Robust & durable aluminum casing CED coated

WORKING LENGTH

6 ft.

WEBBING

Material: Dyneema
Minimum Breaking Strength: 4500 lbs.

WEIGHT

6.40 lbs. ± 0.22 lbs.

RELEVANT STANDARDS



Meets or Exceeds ANSI Z359.14-2021 Class 1



Class

1

Anchor at or
above dorsal D-ring

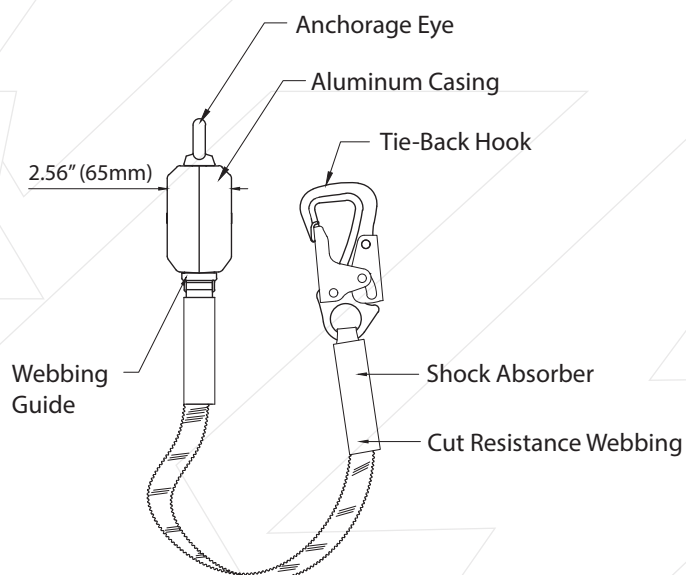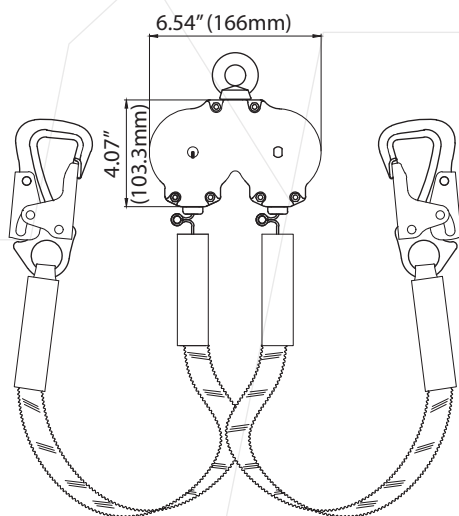

Batch #: _____ Serial #: _____
Date of First Use: _____