

KStrong® Micron™ 6 ft. Arc Flash Rated SRL with Steel Snap Hook (ANSI) - Harness Connector Included

Model: UFS390006

MICRON™

SRL SERIES

6 ft. Arc Flash Rated SRL with Steel Snap Hook - Harness Connector Included

DESIGN

- Lightest available SRL in its range/class
- Robust & durable plastic casing
- Technora Webbing with FR cover on Energy absorber
- Steel Snap Hook at Attachment end
- Quarter turn locking steel carabiner at Anchorage end

LENGTH

6 ft.

WEBBING


Material: Technora Webbing 13/16"
Minimum Breaking Strength: 4500 lbs. (2041kg)

WEIGHT

3.05 lbs. ± 0.02 lbs. (1383gm ± 9gm)


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1




The Micron™ series of SRL's have not only been tested to ANSI Z359.14-2021 but also to a Fall Factor of 2. This means that when a preferred overhead anchor point is not present, a worker may connect to a suitable anchor up to 5 ft. below the dorsal D-ring height of their full body harness.

FRONT VIEW

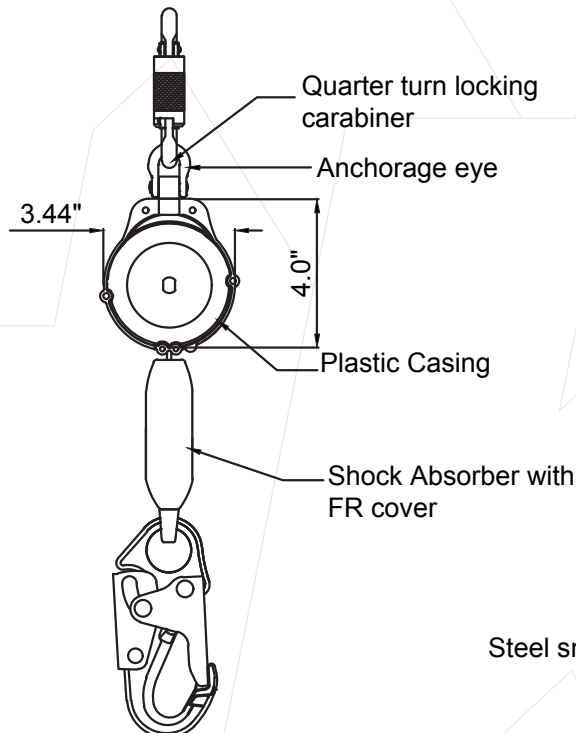

SIDE VIEW

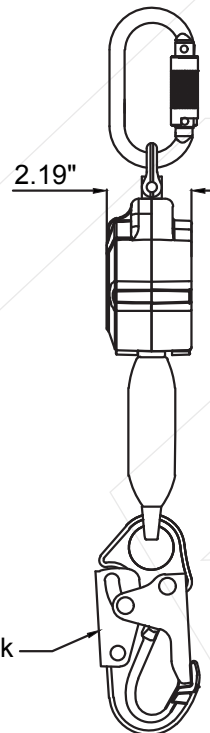

Batch #: _____ Serial #: _____
Date of First Use: _____