

KStrong® Micron™ Dual 6 ft. Arc Flash Rated SRL with Steel Snap Hooks (ANSI) - Dual dorsal connector included

Model: UFS390006D

MICRON™

SRL SERIES



DESIGN

- Designed to be used as retractable twin leg shock absorbing lanyard
- Robust & durable plastic casing
- Technora Webbing with FR cover on Energy absorber
- Steel Snap Hook at Attachment end
- Quarter turn locking steel carabiner at Anchorage end
- Has swivel anchorage eye at anchorage end
- Ultralight design almost unnoticeable on the users back
- Twin SRL connector for connection to the Dorsal attachment of harness

LENGTH

6 ft.

WEBBING

Material: Technora Webbing 13/16"
Minimum Breaking Strength: 4500 lbs. (2041kg)

WEIGHT

5.50 lbs. ± 0.02 lbs. (2495gm ± 9gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1


**OSHA
RATED**



**Class
1**

Anchor at or
above dorsal D-ring

The Micron™ series of SRL's have not only been tested to ANSI Z359.14-2021 but also to a Fall Factor of 2. This means that when a preferred overhead anchor point is not present, a worker may connect to a suitable anchor up to 5 ft. below the dorsal D-ring height of their full body harness.

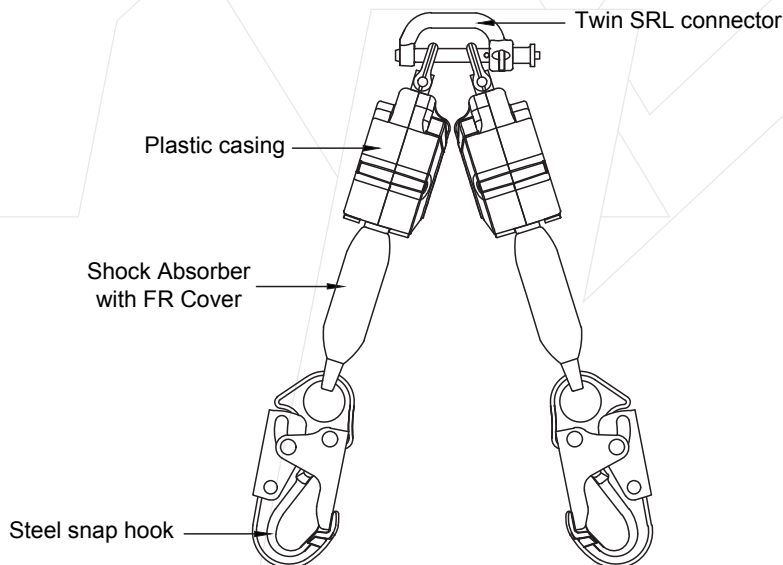

Batch #: _____ Serial #: _____
Date of First Use: _____