

## KStrong® Micron™ 6 ft. Arc Flash Rated SRL with Steel Rebar Hook (ANSI) - Harness Connector Included

Model: UFS394006

### MICRON™ SRL SERIES

6 ft. Arc Flash Rated SRL with Steel Rebar Hook - Harness Connector Included

#### DESIGN

- Lightest available SRL in its range/class
- Robust & durable plastic casing
- Technora Webbing with FR cover on Energy absorber
- Forged steel scaffold hook at retractable end
- Quarter turn locking steel carabiner at Anchorage end

#### LENGTH

6 ft.

#### WEBBING


Material: Technora Webbing 13/16"  
Minimum Breaking Strength: 4500 lbs. (2041kg)

#### WEIGHT


4.05 lbs. ± 0.02 lbs. (1837gm ± 9gm)

#### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 1



The Micron™ series of SRL's have not only been tested to ANSI Z359.14-2021 but also to a Fall Factor of 2. This means that when a preferred overhead anchor point is not present, a worker may connect to a suitable anchor up to 5 ft. below the dorsal D-ring height of their full body harness.

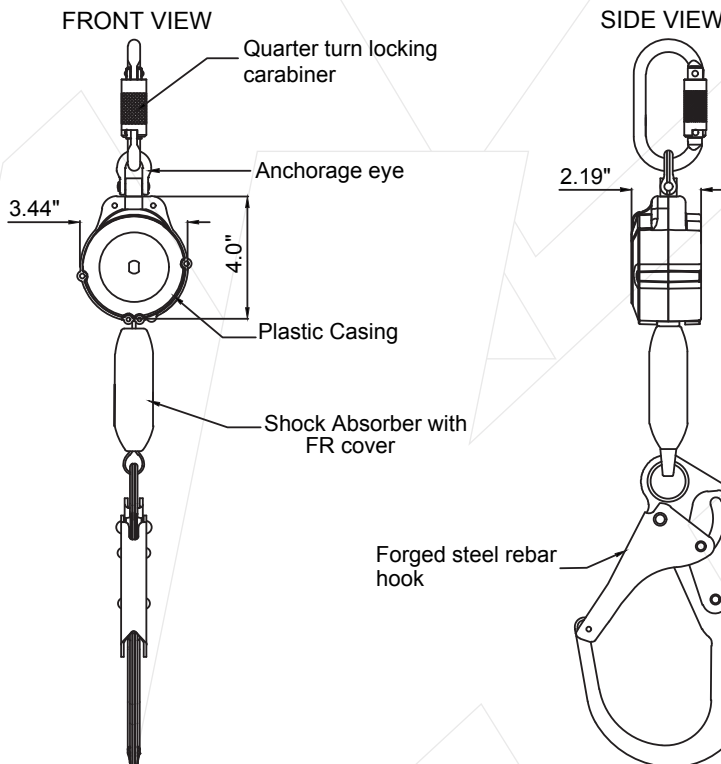

Batch #: \_\_\_\_\_ Serial #: \_\_\_\_\_  
Date of First Use: \_\_\_\_\_