

KStrong® BRUTE™ Sealed 25 ft. SRL with Stainless Steel Cable and Aluminum Swivel Carabiner Hook. Includes Aluminum Installation Carabiner and Tagline (ANSI)

Model: UFS570025

BRUTE™

SEALED SERIES

DESIGN

- Sealed design to restrict entry of dust, chemicals, fumes or any liquids inside to protect critical internal parts from contamination in off shore and areas where chemical hazard is evident.
- Robust & durable Polymer casing
- D-Shackle at anchorage point for making connections
- Aluminum quarter turn locking hook with fall indicator at attachment end
- Stainless Steel wire rope

CABLE

Material : Stainless Steel wire rope Ø7/32"

LENGTH

25 ft

WEIGHT

15.35 lbs. ± 0.22 lbs

USER CAPACITY

ANSI User Capacity: 310 lbs. Max.
OSHA User Capacity: 420 lbs. Max

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021

Class

1

Anchor at or above dorsal D-ring


OSHA
RATED

420
LBS.


BRUTE



Front View

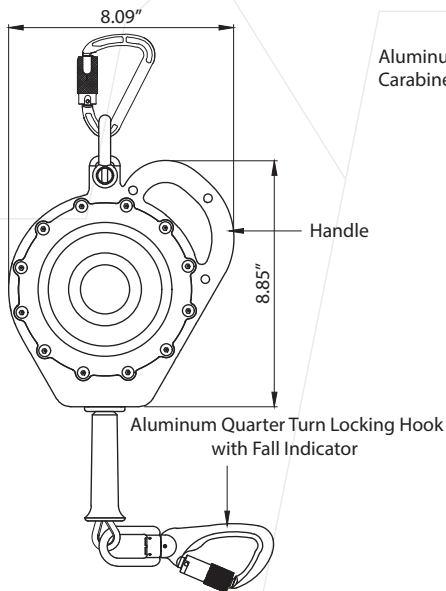

Side View

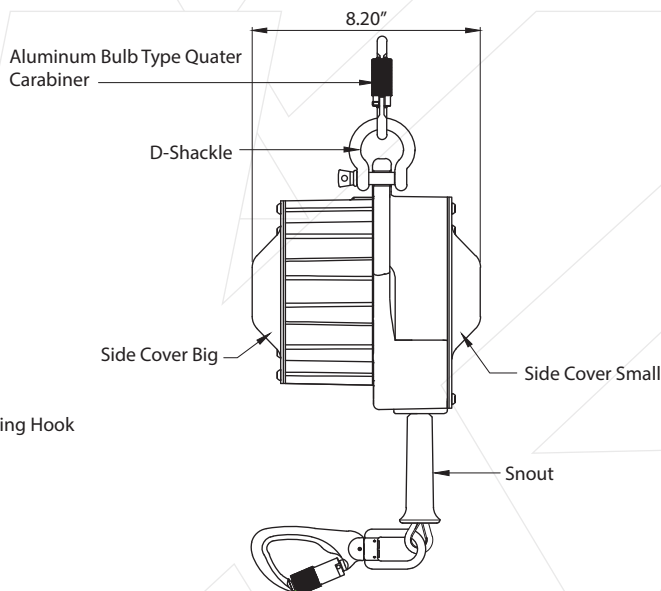

Batch #: _____ Serial #: _____

Date of First Use: _____