

KStrong® EndurX™ 5-Point Full Body Harness, Abrasion Resistant Shoulder Pad, Premium Work Positioning Waist Pad w/ Removable Tool Belt, Deluxe Leg Pads, Enhanced Dorsal D-ring Plus™, Side D-rings, Quick Slide Adjusters, Trauma Relief Straps, QC Chest/Legs, All Aluminum Hardware (ANSI)

Model: UFH11502Q

EndurX™
 FULL BODY HARNESS

MODEL	SIZE	WEIGHT
UFH11502Q(XS)	XS	7.10 lbs. ± 5%
UFH11502Q(S)	S	7.20 lbs. ± 5%
UFH11502Q(M)	M	7.35 lbs. ± 5%
UFH11502Q(L)	L	7.35 lbs. ± 5%
UFH11502Q(XL)	XL	7.56 lbs. ± 5%
UFH11502Q(2XL)	2XL	8.17 lbs. ± 5%
UFH11502Q(3XL)	3XL	8.59 lbs. ± 5%

DESIGN

- Breathable Ultra Premium Shoulder Padding with Armor Hull™ and Ultra Premium Leg Padding equipped with Reflective Piping
- Stand-Up Dorsal D-ring with integrated Enhanced Dorsal D-ring+ for quick connection to SRL-P
- Suspension Trauma Straps integrated on cross sub-pelvic strap
- Compass™ Ready RFID tag for easy asset management
- D-ring configuration: 1 Dorsal, 2 Side Work Positioning
- Quick Connect Chest and Leg Buckles
- Quick Slide Torso Adjusters with no extra strapping left over (Patent Pending)
- Premium Work Positioning Waist Pad w/Removable Tool Belt equipped with 4 Tool Tether Tails
- Abrasion Resistant Shoulder Guards to better protect webbing when carrying materials

WEBBING

Material: Polyester
 Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
 Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester

METAL COMPONENT

Material: Aluminum Hardware
 Finish: Black Anodized


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021



Front View

Back View

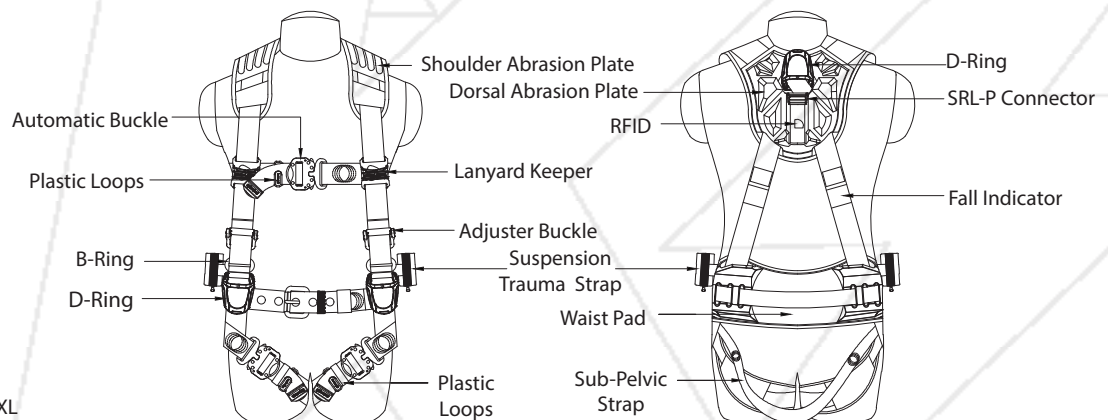

STITCHING DESIGN

AVL. Size : XS, S, M, L, XL, 2XL, 3XL

Batch #: _____ Serial #: _____

Date of First Use: _____