

KSTRONG 2 MAN 20M WEBBING HORIZONTAL LIFELINE

AFA940001

KStrong Horizontal Lifeline has been designed to be a temporary webbing static line allowing the users to be secured either in restraint or fall arrest when working near exposed edges.

Features

- Consists of Ratchet Tensioner that allows easy tensioning of the lifeline between two structures.
- Has 2 Cross Arm Straps each to tie off to the structure where the anchorage is required.
- The complete system is supplied in a bag, which is permanently attached to the assembly and also enables the user to easily transport.
- Lanyard can be connected with Karabiners to the HLL allowing movement along the length while keeping the user secured and safe at all times.
- Suitable for 2 users.



How To Use

Refer to User Instruction Manual 

Textile Components

Webbing	:	Polyester 30mm Wide MBS 25kN
Cross Arm Strap	:	Polyester 44mm MBS 25kN

Metal Components

Karabiners (AFC601105)	:	Alloy Steel Galvanized With Silver Passivation MBS 6kN
Ratchet Tensioner	:	Carbon Steel Silver Passivation 15kN MBS

System Strength and Span


Minimum Breaking Strength	:	25kN
Minimum Span	:	5M
Maximum Span	:	20M

Weight

4.120kg ± 0.05kg

Relevant Standards

EN 795:2012 & TS 16415:2013 Type B and C (for upto 2 users)

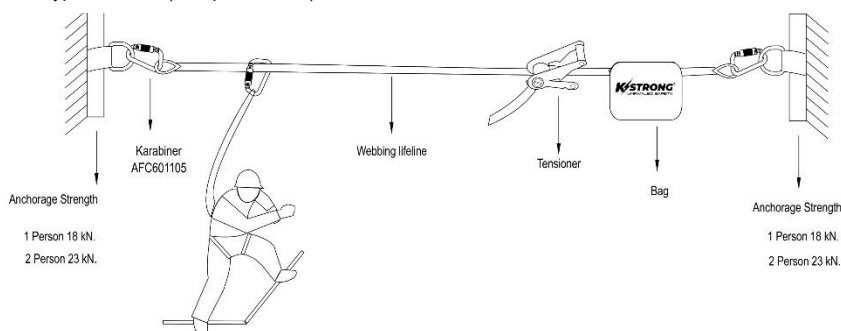

CE 0598