

# EPIC

## ENERGY ABSORBING WEBBING LANYARD

# TECHNICAL DATA SHEET



KStrong has developed a range of Shock Absorbing Webbing Lanyards to ensure the user is protected when working at heights. The shock absorber effectively arrests the fall, minimising the forces to the body.


# EPIC

## ENERGY ABSORBING WEBBING LANYARD



ENERGY ABSORBING 44MM WEBBING LANYARD

**ANL401150**

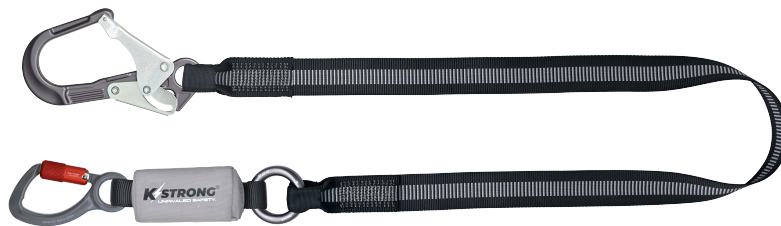

ENERGY ABSORBING 44MM WEBBING LANYARD

**ANL401160**



ENERGY ABSORBING 44MM DOUBLE LEG LANYARD

**ANL406650**

# EPIC

## ENERGY ABSORBING WEBBING LANYARD

LANYARD CODES			
<b>FEATURES</b>	ANL401150	ANL401160	ANL406650
LANYARD WEIGHT			
	674gm	1084gm	1080gm
FEATURES			
44MM WEBBING	✓	✓	✓
ALUMINUM TRIPLE ACTION KARABINER	✓	✓	✓
ENDURE WEBBING (OIL & WATER REPELLENT)	✓	✓	✓
ALUMINUM SCAFFOLD HOOKS		✓	✓
LABEL PACK	✓	✓	✓
ENERGY ABSORBER	✓	✓	✓
COMPASS ASSET TECHNOLOGY	✓	✓	✓
LENGTH IN METERS			
	2m	2m	2m
CAPACITY			
	140kg	140kg	140kg
RELEVANT STANDARDS			
AS 1891.5:2002	✓	✓	✓
<b>10 Year Shelf Life From Date Of Manufacture.</b>			

# EPIC

## ENERGY ABSORBING WEBBING LANYARD

### MATERIAL SPECIFICATIONS

#### WEBBING

- Polyester 44mm wide
- MBS 25kN
- Endure Webbing Coating

#### THREAD / STITCHING

- High Tenacity Polyester (Colour Contrasted)

#### METAL COMPONENTS

- Aluminum Triple Action Karabiner- MBS 23kN & Gate strength 16kN
- Aluminum Scaffold Hook- MBS 23kN & Gate strength 16kN
- Finish- Silver Passivation

#### ENERGY ABSORBER

- 44mm Polyester Back Up Webbing
- 44mm Polyamide Tear Webbing
- Protective Covering