

EPIC

ENERGY ABSORBING WEBBING LANYARD

TECHNICAL DATA SHEET



KStrong has developed a range of Shock Absorbing Webbing Lanyards to ensure the user is protected when working at heights. The shock absorber effectively arrests the fall, minimising the forces to the body.


EPIC

ENERGY ABSORBING WEBBING LANYARD



ENERGY ABSORBING 44MM WEBBING LANYARD

ANL401150

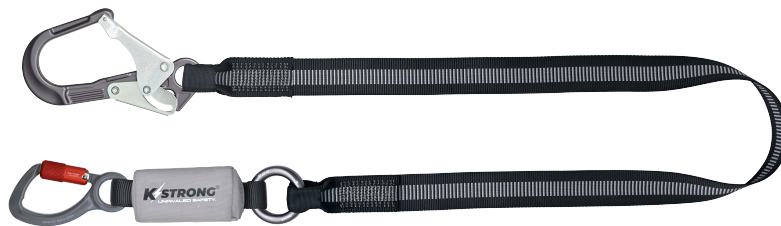

ENERGY ABSORBING 44MM WEBBING LANYARD

ANL401160



ENERGY ABSORBING 44MM DOUBLE LEG LANYARD

ANL406650

EPIC

ENERGY ABSORBING WEBBING LANYARD

LANYARD CODES			
FEATURES	ANL401150	ANL401160	ANL406650
LANYARD WEIGHT			
	674gm	1084gm	1080gm
FEATURES			
44MM WEBBING	✓	✓	✓
TRIPLE ACTION ALUMINUM SNAP HOOK	✓	✓	✓
ENDURE WEBBING (OIL & WATER REPELLENT)	✓	✓	✓
ALUMINUM SCAFFOLD HOOKS		✓	✓
LABEL PACK	✓	✓	✓
ENERGY ABSORBER	✓	✓	✓
COMPASS ASSET TECHNOLOGY	✓	✓	✓
LENGTH IN METERS			
	2m	2m	2m
CAPACITY			
	140kg	140kg	140kg
RELEVANT STANDARDS			
AS 1891.5:2002	✓	✓	✓
10 Year Shelf Life From Date Of Manufacture.			

EPIC

ENERGY ABSORBING WEBBING LANYARD

MATERIAL SPECIFICATIONS

WEBBING

- Polyester 44mm wide
- MBS 25kN
- Endure Webbing Coating

THREAD / STITCHING

- High Tenacity Polyester (Colour Contrasted)

METAL COMPONENTS

- Triple Action Aluminum Snap Hooks- MBS 23kN & Gate strength 16kN
- Aluminum Scaffold Hook- MBS 23kN & Gate strength 16kN
- Finish- Silver Passivation

ENERGY ABSORBER

- 44mm Polyester Back Up Webbing
- 44mm Polyamide Tear Webbing
- Protective Covering