

**ELEMENT**  
**FULL BODY HARNESS**

UFH10731P

**KStrong® Element Arc Flash Rated  
5-Point Full Body Harness Padded  
with Belt, 3 D-rings, Mating Buckle  
Legs and Chest (ANSI)**

KStrong® Element Arc Flash Rated 5-Point Adjust Full Body Harness with One (1) Back D-Ring, Two (2) Side D-Rings, Padded Back and Shoulders, Comfort Waist Pad and Tool Belt, and Mating Buckle Leg and Chest Closures (ANSI).

**DESIGN**

- 5-Point adjustable full body harness made with FR webbing.
- Shoulder, chest, and leg straps with Dielectric friction buckles for easy adjustment
- One back Dielectric D-Rings for fall arrest
- Two Dielectric D-Rings at the waist level for work positioning
- Waist Belt for Lumbar support

**WEBBING**

Material: Aramid  
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)  
Breaking Strength: 5000 lbs.

**STITCHING THREAD**

Material: Kevlar

**METAL COMPONENT**

Material: Alloy Steel core with reinforced Polymer.  
Finish : Black Moulded

**CAPACITY RANGE**


ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

**RELEVANT STANDARDS**

Meets or Exceeds ANSI Z359.11-2021, ASTM F887-20




BACK VIEW

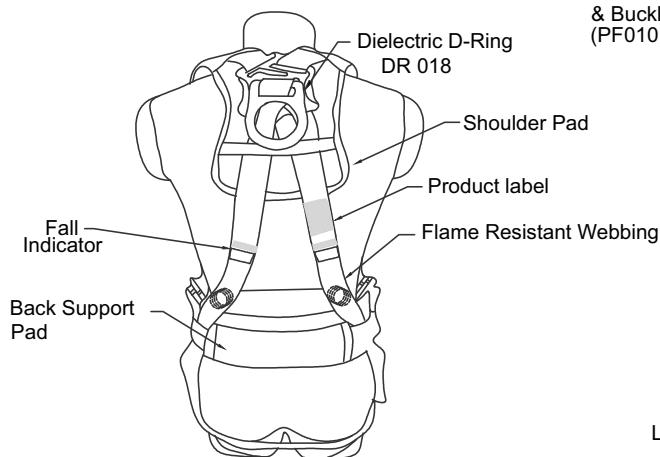

Meets or Exceeds ANSI Z359.11-2021, ASTM F887-20

FRONT VIEW

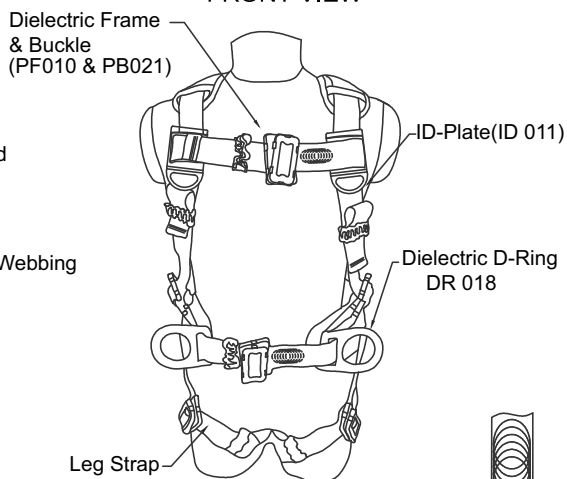

STITCHING DESIGN