TWO PIECE CONCRETE ANCHOR SS M12X110MM

AFA935515

The KStrong Two Piece Concrete Anchor SS M12x110mm AFA935515 is designed for use as a Single Point Anchor by a Single User in Fall Restraint, Fall Arrest or Abseiling.

Features

- May be fixed to concrete using chemical adhesive such as Hilti RE-100 or RE-500. Chemical adhesive not included. See User Instruction Manual (UIM) for minimum fixing specifications.
- Suitable for Fall Restraint, Fall Arrest and Abseil.
- Maximum 1 user when used as a Single Point Anchor.
- Limited multidirectional use, and may not exceed 20deg loading in tension, when installed into concrete.
- This product should not deform under 15kN loads when used as a Single Point Anchor.
- Anchorage Structural Requirement for this product when used as a Single Point Anchor is 15kN.

How To Use

See User Instruction Manual (UIM) for details of how to install and use this product.

Components

316 Stainless Steel

Product Strength

15kN when used as a Single Point Anchor.

Weight

300g +/- 25g

Relevant Standards

ASNZS 5532 2013, ASNZS 1891.4 2025

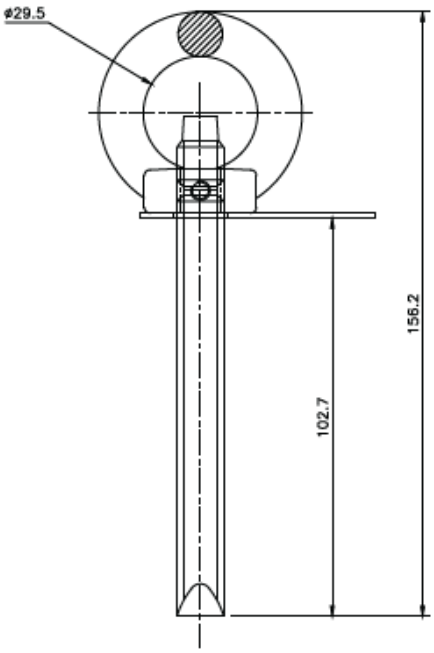

Inspection & Testing

This product should be inspected before and after use by the user, and every 12 months by a competent person other than the user. When installed into concrete this product must also be load-tested to 50% of its strength rating, for a period of 3 minutes, as part of its inspection by a competent person.