KStrong® Ladder Extension Davit Kit for Fixed Ladders

DESIGN

• The Ladder Extension Davit Kit is designed to be attached to the upper section of the ladder allowing the user to be connected at all times, ensuring complete safety.

• A basic and effective tool used to provide additional support for assisting users while transitioning from a ladder to a raised working surface.

• Compatible to accommodate a minimum rung diameter of Ø0.87" (22mm) to a maximum rung dia. Ø1.73"(44mm).

MATERIALS

Alloy Steel ED Coated Black

WEIGHT

30.31 lbs. ± 0.22 lbs. (13.75kg ± 0.10kg)

RELEVANT STANDARDS

Meets or Exceeds EN 795:2012 Type A

INSTALLATION


If the Ladder System has been provided with the Extension Arm, this shall be installed in place of Upper Mounting Bracket as the Extension Arm is provided pre-installed with the Mounting Bracket for the Upper end of the system.

Follow The Simple Steps For Easy Installation (Top Rung)

• Hold the extension arm against the upper last three rungs of the ladder.

- Hold the fisher plate in front of the extension arm.
- Insert the given U-bolts through the rung in to the fisher plate. Tighten the nuts of the U-bolts
- Repeat the exercise for the Second Rung from the top.

• On the third rung of the ladder, from the top Insert the given U-bolt through the ladder rung in to the slot so as to pass through the extension arm tighten the nuts of the U-Bolt.

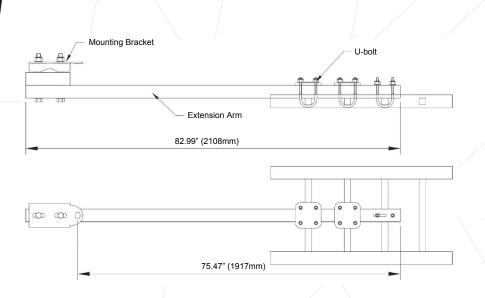

Model: UFF516000

