

KStrong® Kapture™ Climbing 5-Point FBH, Front D-ring, Dorsal D-ring, MB Legs (ANSI)

KStrong® Kapture™ Climbing 5-Point Full Body Harness, Front D-ring, Dorsal D-ring, Mating Buckle Legs (ANSI).

DESIGN

- One dorsal attachment D-ring for fall arrest and one front D-ring for climbing.
- Adjustable Shoulder straps.
- Adjustable leg straps.
- Two side D Ring for work positioning

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity Polyester.



METAL COMPONENT

Material: Alloy Steel
Finish : Silver or Golden Yellow Galvanized

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2014

| MODEL | SIZE | WEIGHT |
|-----------------|------------------|--|
| UFH10251P(L-XL) | Large to X-Large | 3.30 lbs. ± 0.02 lbs. (1500 gm ± 10 gm) |
| UFH10251P(M-L) | Medium to Large | 3.19 lbs. ± 0.02 lbs. (1450 gm ± 10 gm) |
| UFH10251P(S-M) | Small to Medium | 3.08 lbs. ± 0.02 lbs. (1400 gm ± 10 gm) |

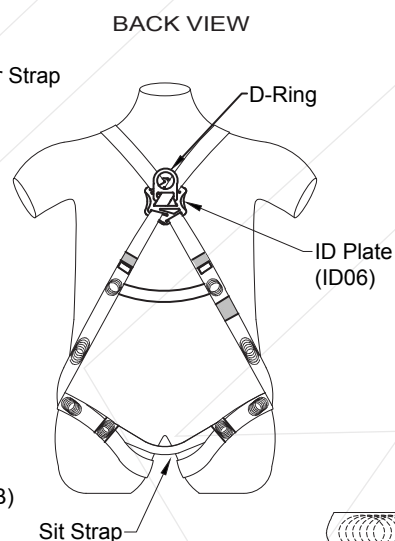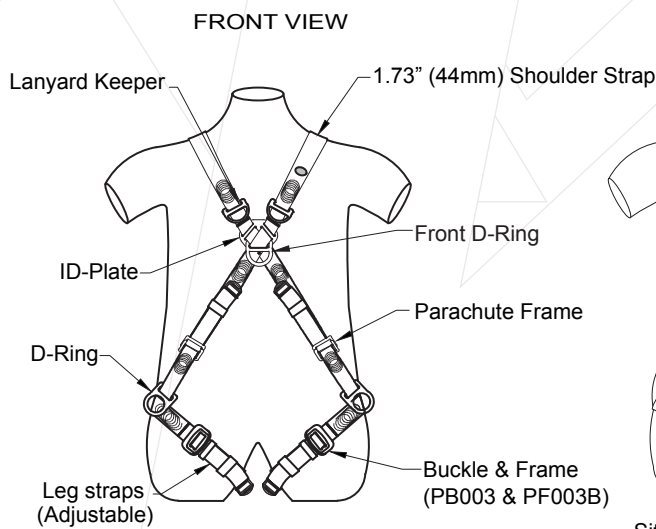

STITCHING DESIGN

Meets or Exceeds ANSI Z359.11-2014