

### KStrong® Kapture™ Elite 5-Point Full Body Harness, Dorsal D-ring, Front D-Ring, 2 Side D-rings, MB Legs (ANSI)

#### DESIGN

- One dorsal attachment D-ring for fall arrest and one sternal D-ring for climbing
- Two side D-Rings for work positioning
- Sub-pelvic and back straps
- Adjustable shoulder and chest straps
- Adjustable mating buckle leg straps

#### WEBBING

Material: Polyester  
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)  
Breaking Strength: 5000 lbs.

#### STITCHING THREAD

Material: High-tenacity Polyester

#### METAL COMPONENT

Material: Alloy Steel




#### CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

#### RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021

MODEL	SIZE	WEIGHT
UFH10252P(S-M)	Small to Medium	3.79 lbs. ± 0.02 lbs. (1720 gm ±10 gm)
UFH10252P(M-L)	Medium to Large	3.88 lbs. ± 0.02 lbs. (1762 gm ±10 gm)
UFH10252P(L-XL)	Large to X-Large	3.94 lbs. ± 0.02 lbs. (1788 gm ±10 gm)
UFH10252P(XL-2XL)	X-Large to 2XL	3.98 lbs. ± 0.02 lbs. (1804 gm ±10 gm)
UFH10252P(2XL-3XL)	2XL to 3XL	4.03 lbs. ± 0.02 lbs. (1828 gm ±10 gm)

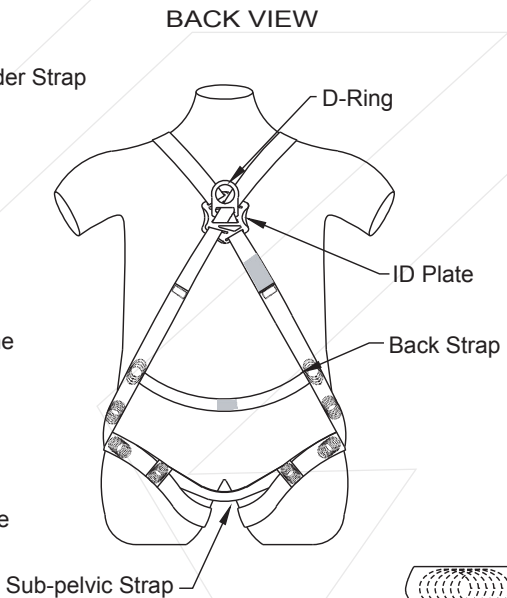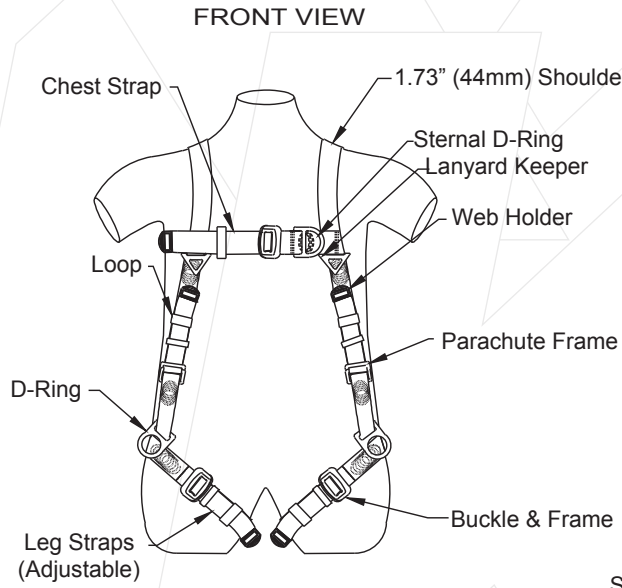

STITCHING DESIGN

Meets or Exceeds ANSI Z359.11-2021

Batch #: \_\_\_\_\_ Serial #: \_\_\_\_\_  
Date of First Use: \_\_\_\_\_