

KStrong® Kapture™ Element Arc Flash Rated 5-Point Full Body Harness, Web Loop Dorsal and Front D-rings, Mating Buckle Legs and Chest (ANSI)

MODEL	SIZE	WEIGHT
UFH10711P(S-L)	Small to Large	4.63 lbs. ± 0.02 lbs. (2100 gm ±10 gm)
UFH10711P(L-XL)	Large to X-Large	4.85 lbs. ± 0.02 lbs. (2199 gm ±10 gm)

DESIGN

- 5-point adjustable full body harness made with arc flash webbing.
- Shoulder straps with dielectric friction buckles for easy adjustment
- Chest straps & leg straps with dielectric pass thru buckles for easy adjustment
- One back textile loop at dorsal for fall arrest
- One front textile loop for ladder climbing

WEBBING

Material: Aramid
 Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
 Breaking Strength: 5000 lbs.

STITCHING THREAD



Material: Kevlar

METAL COMPONENT

Material: Alloy steel core with reinforced polymer.
 Finish: Black molded

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021, ASTM F887-20

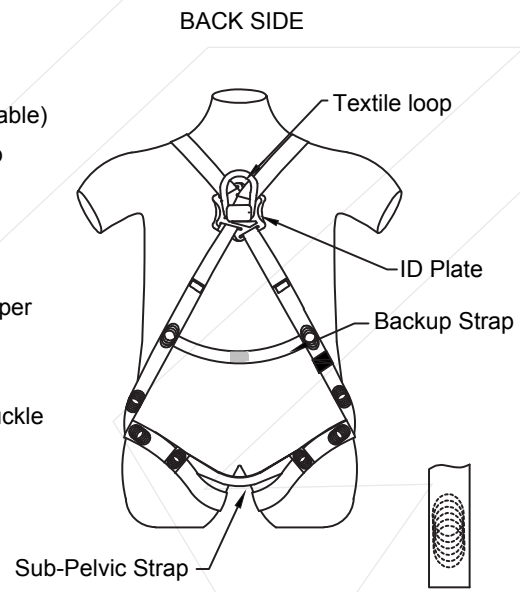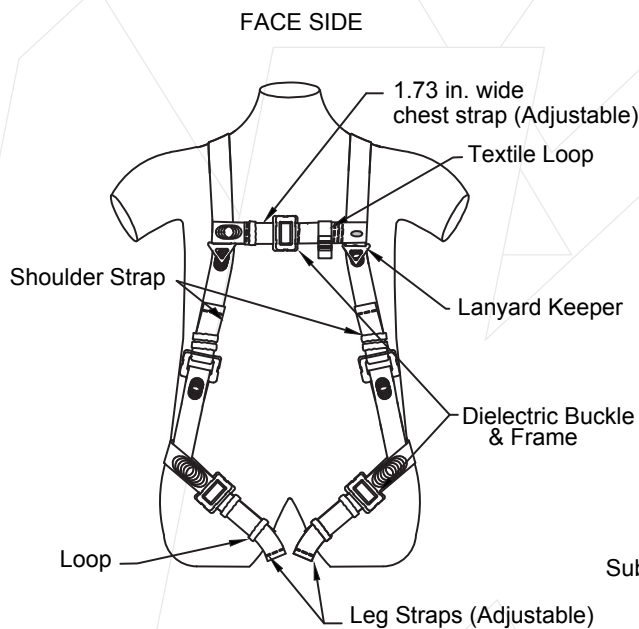

STITCHING DESIGN

Batch #: _____ Serial #: _____
 Date of First Use: _____