

KStrong® Kapture™ Element Oil and Gas Derrick Deluxe Harness with 4 D-rings

Oil and Gas Derrick Deluxe Harness with 4 D-rings.

DESIGN

- Features 2.75" (70mm) wide integrated sling seat with suspension D-rings
- Equipped with Parachute frame to attach belly belt
- Equipped with Dorsal D-ring Extension & waist D-ring for restraint application
- Equipped with work positioning belt with padding for user comfort
- Grommeted leg straps provides 9 positions of adjustment

WEBBING

Material: Polyester
Width: 1.73 in. ± 0.04 in. (44mm ± 1mm)
Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT

Material: Alloy Steel;
Finish: Silver or Golden Yellow Galvanized


RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021


MODEL	SIZE	WEIGHT
UFH90341G(S-M)	Small to Medium	7.03 lbs. ± 0.02 lbs. (3190gm ± 10gm)
UFH90341G(M-L)	Medium to Large	7.14 lbs. ± 0.02 lbs. (3240gm ± 10gm)
UFH90341G(L-XL)	Large to X-Large	7.25 lbs. ± 0.02 lbs. (3290gm ± 10gm)
UFH90341G(XL-2XL)	X-Large to 2XL	7.36 lbs. ± 0.02 lbs. (3340gm ± 10gm)



FRONT VIEW

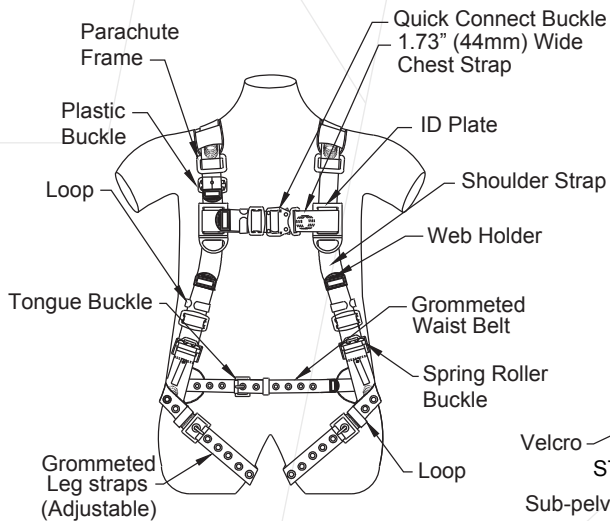

BACK VIEW

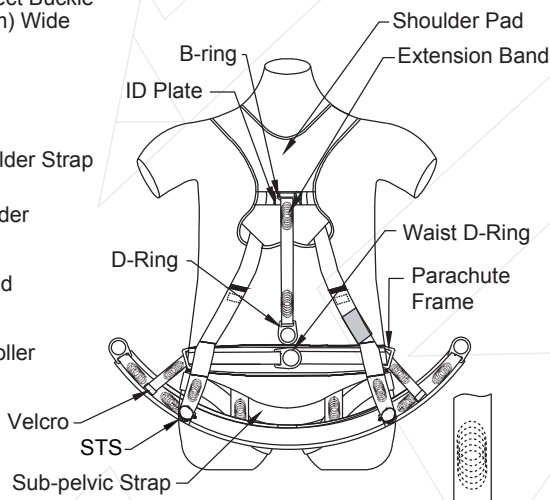

STITCHING DESIGN

Batch #: _____ Serial #: _____
Date of First Use: _____