

KStrong® BRUTE™ Backer™ LE V2

Class 2 - Dual Interchangeable 7.5 ft. Cable SRL-P with 2.5 ft. Web and Tie-Back Hook (ANSI)

Model: UFS319006LDV2



DESIGN

DESIGN:

- Robust & durable plastic casing
- Has swivel anchorage eye at anchorage end
- Ultralight design almost unnoticeable on the users back
- Galvanized steel wire rope
- Single leg tie-back SRL designed to be used in tie-back condition and near a potential leading edge as well
- Equipped with Twin SRL connector for direct connection to the dorsal attachment point of harness
- Tie-back snap hook at the lanyard end to make connection with anchor structure
- External shock pack design for added protection in leading edge application

WORKING LENGTH

7.5 ft. Cable, 2.5 ft. Web

MATERIAL

Cable: Galvanized steel wire rope (Ø3/16")
Minimum Breaking Strength: 3600 lbs.
Tie-Back Webbing Material: 1.18" Polyester


WEIGHT

7.80 lbs. ± 0.22 lbs. (3538gm ± 100gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2021 Class 2

Class
2
Anchor above or below dorsal D-ring

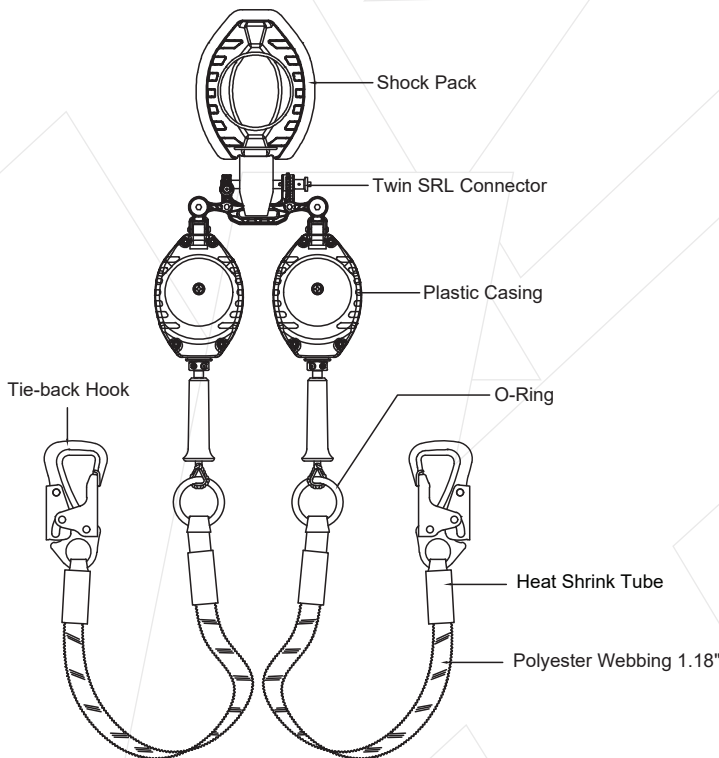

Batch #: _____ Serial #: _____
Date of First Use: _____